




Pcs/1bag
1000

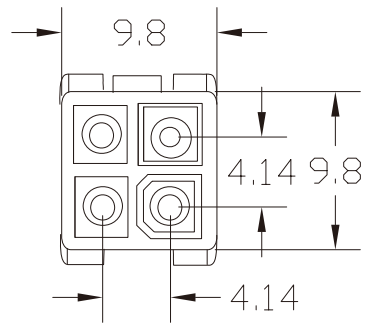


ML-P-2X02

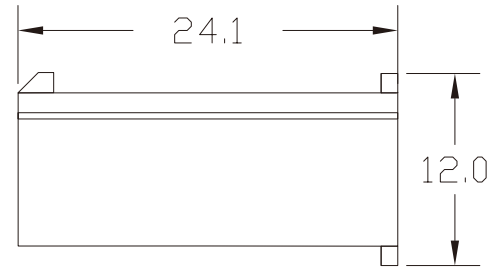


Pcs/1bag
1000

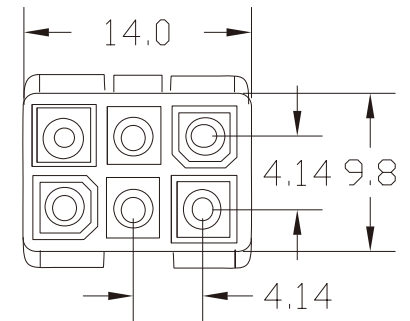


ML-P-2X03

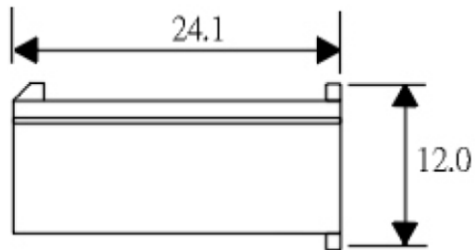


Pcs/1bag
500

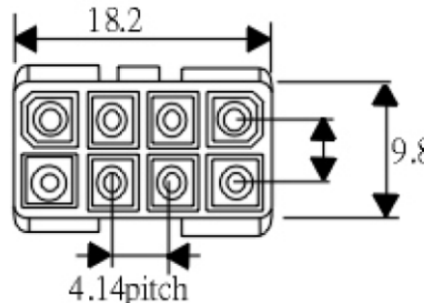

ML-P-2X04

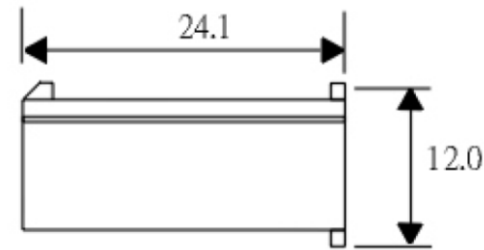

Pcs/1bag
500

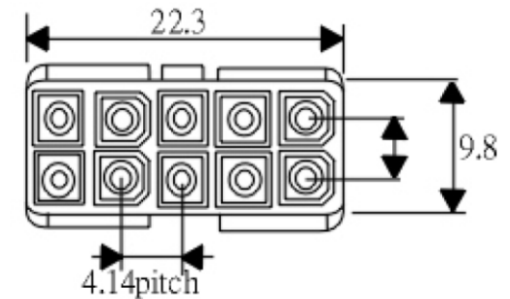

ML-P-2X05

SPECIFICATIONS

Voltage rating:300V AC,DC

Current rating:5A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000MΩHM min

Temperature range:-25°C~+90°C

Material:UL94V-2 Nylon 66

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

ML-P-2Xxx-HF
SERIES | HALOGEN FREE
2X02:04WAY
2X05:10WAY
MALE HOUSING

DESCRIPTION: