


**Features:**

- Material: PA66 UL 94-V2 or 94-V0

**Specification:**

- Current rating: 5A AC, DC
- Voltage rating: 300V AC, DC
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25 °C - 90 °C

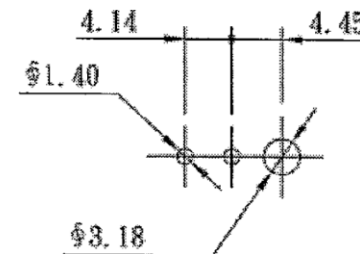

RECOMMENDED LAYOUT FOR 1.57 THICK BOARD  
TOLERANCES NON-ACCUMULATIVE

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
**煜倫股份有限公司**

DRAWING BY CY

X, ±  
.X ± 0.40  
.XX ± 0.25  
.XXX ± 0.08  
ANG ±

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION

照片框

**ORDER INFORMATION**

ML-PDP-1X02-LF  
SERIES | POST | LEADFREE  
02 WAY  
DIP 180°  
MALE

DESCRIPTION:

[www.morethanall.com](http://www.morethanall.com)