
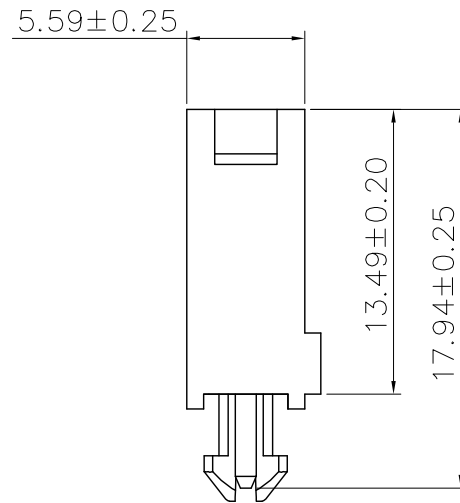


PCB LAYOUT

Material:  
 Housing: PA66,UL94V-0,White  
 Pin: Brass,Tin plated or  
 Nickel

Electrical Characteristics:  
 Rated Current: 9.0AMP  
 Voltage rating: 600V AC,DC  
 Temperature range: -40°C~+  
 105°C  
 Insulator Resistance: 1000MΩ  
 Min  
 Withstanding Voltage: 1500V  
 AC/minute  
 Contact Resistance: 20mΩ  
 Max

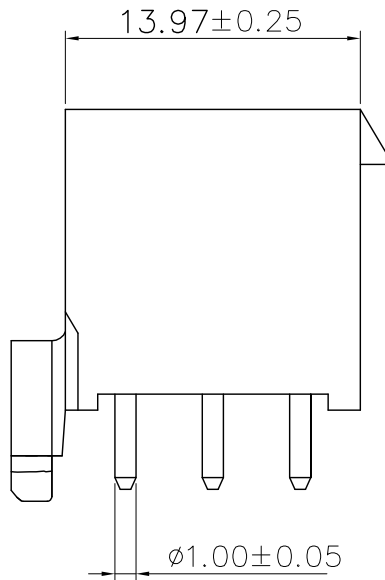

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±

PJECTION

照片框

ORDER INFORMATION

ML-PDP-1X03-LF  
 SERIES POST 03 WAY LEADFREE  
 DIP 180°  
 MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: