
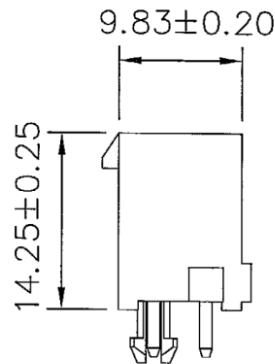


P.C.B LAYOUT

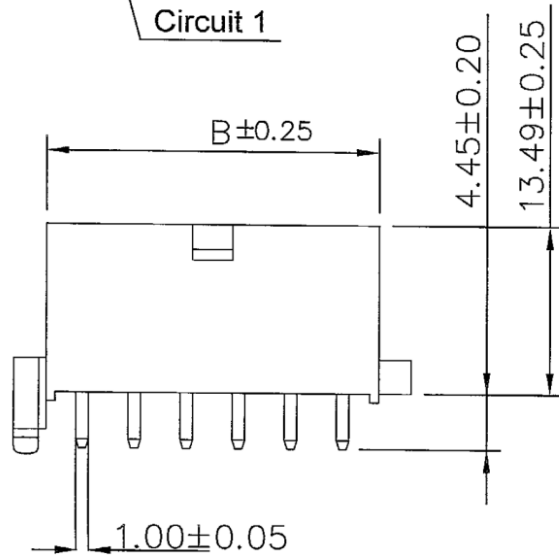

Features:

- 4 ~ 12 circuits available
- Material: PA66 UL 94V-0
- Pin:  $\varnothing 1.00$  round pin

Specification:

- Current rating: 5A AC, DC
- Voltage rating: 300V AC, DC
- Insulation resistance: 1000M $\Omega$  Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25° C ~ 90° C

CIRCUITS	Dimensions		
	A	B	C
04	4.14	9.83	15.01
06	8.28	13.97	19.15
08	12.42	18.11	23.27
10	16.56	22.25	27.41
12	20.70	26.39	31.55

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

X,  $\pm$   
.X  $\pm$  0.40  
.XX  $\pm$  0.20  
.XXX  $\pm$  0.08  
ANG  $\pm$

PPOJECTION

照片框


ORDER INFORMATION

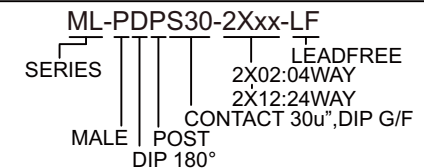



DESCRIPTION:

煜倫股份有限公司

www.morethanall.com

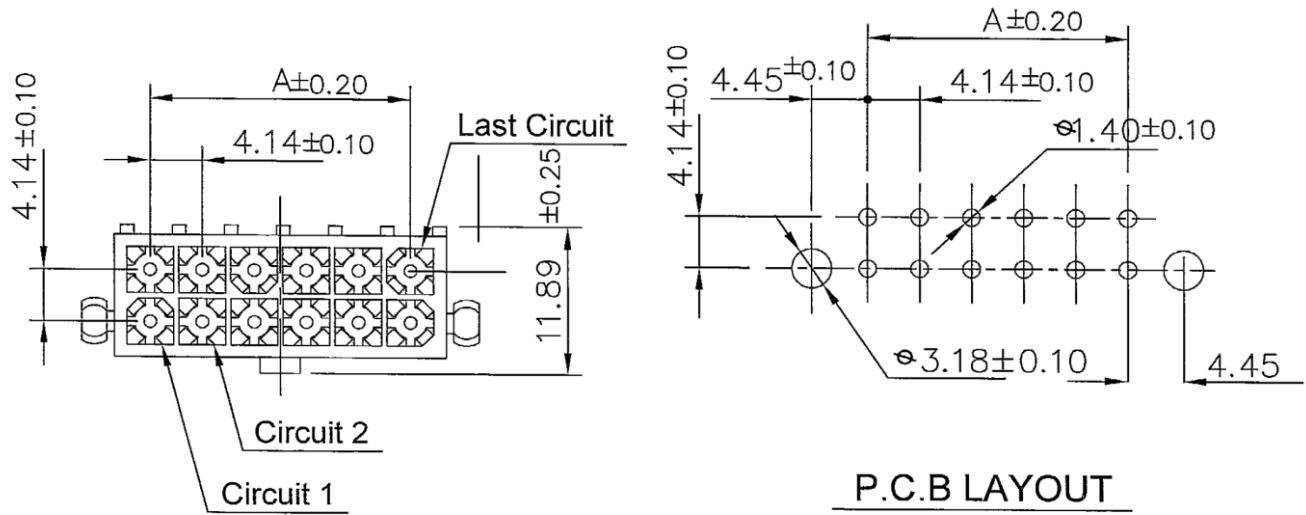

P.C.B LAYOUT

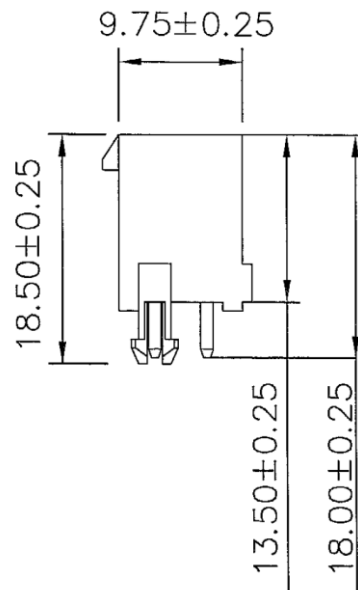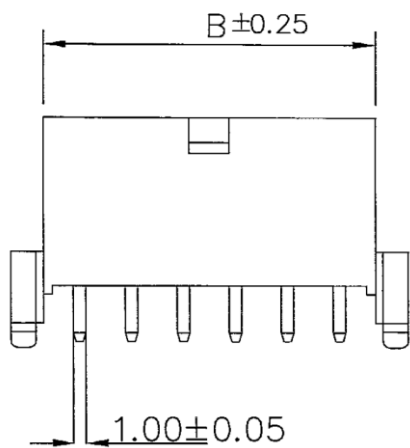

Features:

- 4 ~ 12 circuits available
- Material: PA66 UL 94V-0
- Pin:  $\phi 1.00$  round pin

Specification:

- Current rating: 5A AC, DC
- Voltage rating: 300V AC, DC
- Insulation resistance: 1000M $\Omega$  Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25° C ~ 90° C

CIRCUITS	Dimensions	
	A	B
14	28.84	30.56
16	28.98	34.70
18	33.12	38.84
20	37.26	42.98
22	41.40	47.12
24	45.54	51.28

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

X,  $\pm$   
.X  $\pm$  0.40  
.XX  $\pm$  0.20  
.XXX  $\pm$  0.08  
ANG  $\pm$

PPOJECTION

照片框

ORDER INFORMATION

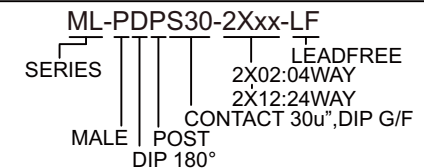

DESCRIPTION: