



Pcs/1bag  
1000

**ML-PE-3X03**

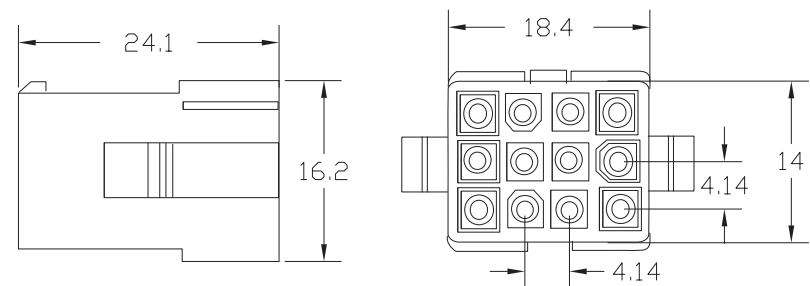

Pcs/1bag  
500

**ML-PE-3X04**

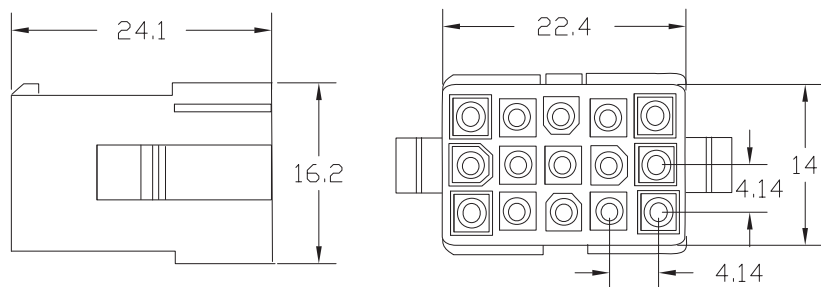

Pcs/1bag  
500

**ML-PE-3X05**

**SPECIFICATIONS**

Voltage rating:300V AC,DC  
 Current rating:5A AC,DC  
 Withstanding voltage:1500V AC/minute  
 Insulation resistance:1000MΩHM min  
 Temperature range:-25°C~+90°C  
 Material:UL94V-2 Nylon 66

**RoHS Compliant**

TOLERANCES ARE


**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司


www.morethanall.com

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT/mm SCALE 1:1  
 DATE  
 SIZE A4 PROJECTION

X.±  
 .X±  
 .XX±  
 .XXX±  
 ANG±



**ORDER INFORMATION**

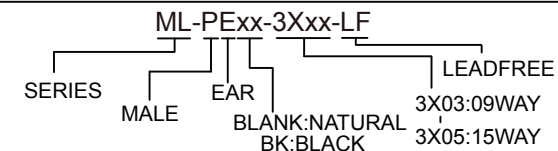

DESCRIPTION: