

Features:

- 4 ~ 24 circuits available
- Material: PA66 UL 94V-0
- Contact: Matte Tin-plated Brass

Specification:

- Current rating: 5A AC, DC
- Voltage rating: 300V AC, DC
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25° C ~ 90° C

CIRCUITS	Dimensions		
	A	B	C
04	4.14	9.83	—
06	8.28	13.97	—
08	12.42	18.11	—
10	16.56	22.25	—
12	20.70	26.39	—

CIRCUITS	Dimensions		
	A	B	C
14	24.84	30.56	8.28
16	28.98	34.70	10.35
18	33.12	38.84	8.28
20	37.26	42.98	10.35
22	41.40	47.12	10.35
24	45.54	51.26	10.35

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION

TOLERANCES ARE



X ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

ML-PRP-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X12:24WAY
POST
DIP 90°
MALE

DESCRIPTION:

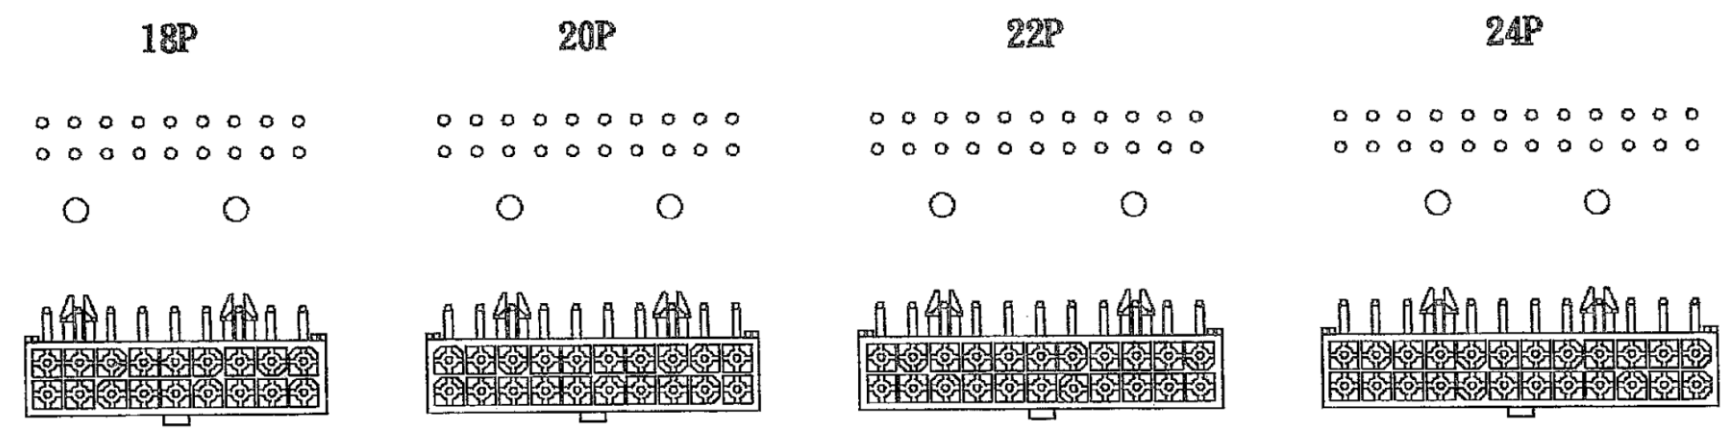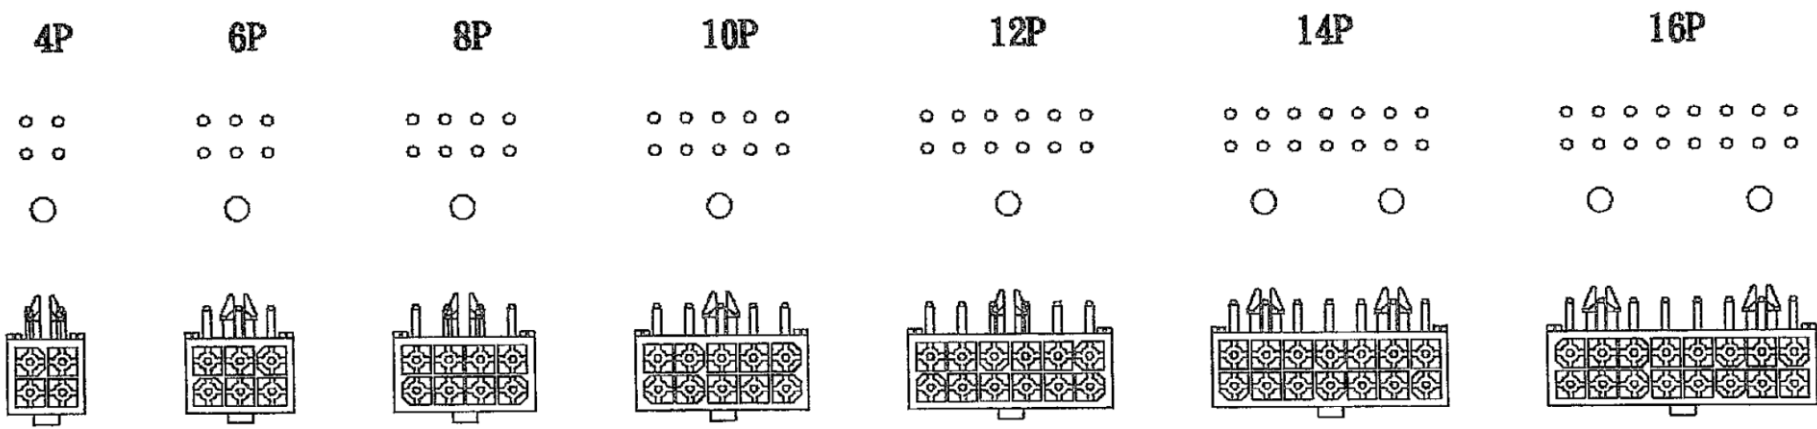

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY	X, ±
CHECKED BY GENIUS	.X ± 0.40
UNIT / mm	.XX ± 0.25
SCALE 1 : 1	.XXX ± 0.08
DATE	ANG ±
SIZE A4	PPOJECTION

照片框

ORDER INFORMATION

ML-PRP-2Xxx-LF

SERIES	POST	LEADFREE
		2X02:04WAY
		2X12:24WAY
	DIP 90°	
	MALE	

DESCRIPTION: