

SPECIFICATIONS

Voltage rating:300V AC,DC



Current rating:5A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000MΩHM min

Temperature range:-25°C~+90°C

Material:UL94V-2 Nylon 66

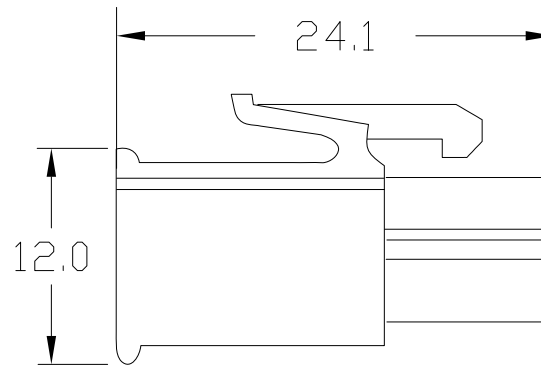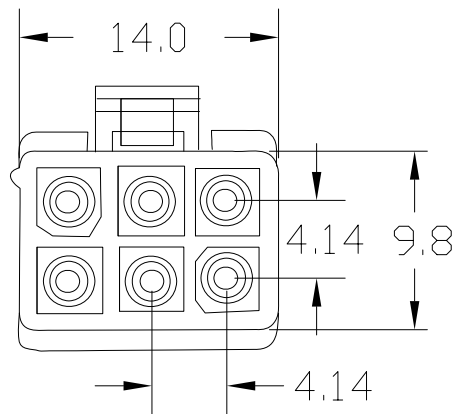

Pcs/1bag

1000

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

ML-S-2X03-LF  
SERIES | LEADFREE  
06 WAY  
FEMALE HOUSING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: