


## Features:

- Material: UL 94V-2 nylon 66

## Specification:

- Current rating: 5A AC, DC
- Voltage rating: 300V AC, DC
- Insulation resistance: 1000M $\Omega$  Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 90°C

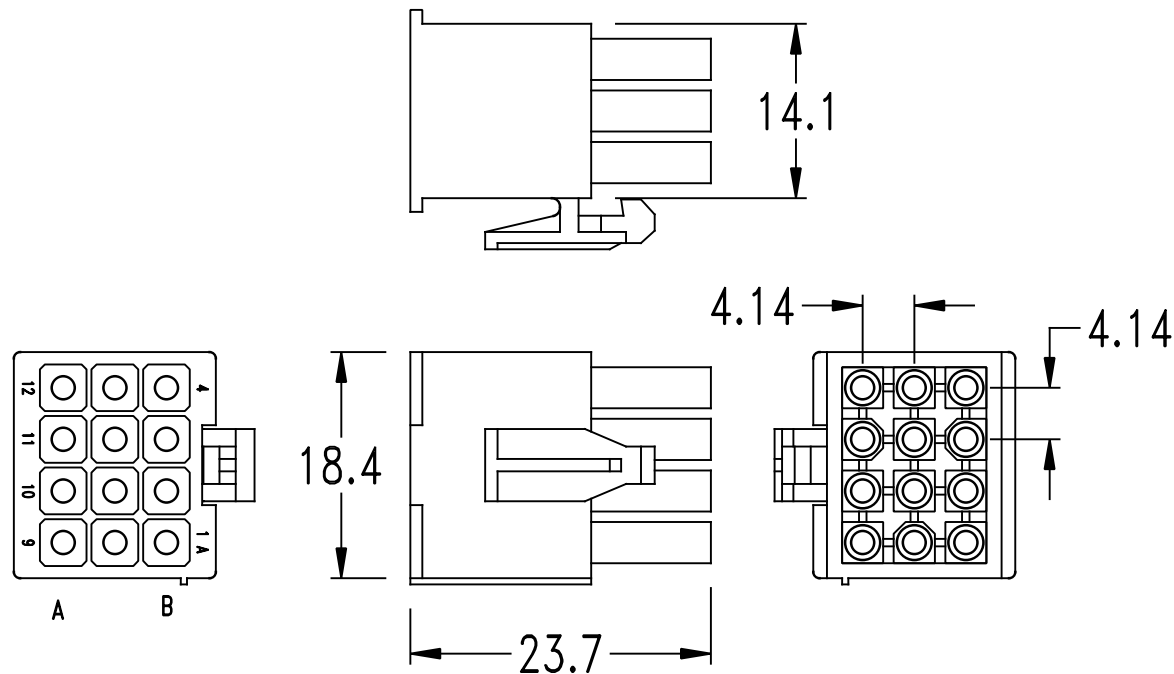

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X,  $\pm$   
.X  $\pm$  0.40  
.XX  $\pm$  0.25  
.XXX  $\pm$  0.08  
ANG  $\pm$

照片框

ORDER INFORMATION

ML-S-3X04-LF  
SERIES | LEADFREE  
12 WAY  
FEMALE HOUSING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: .163"(4.14mm) Crimp Terminal Housing