
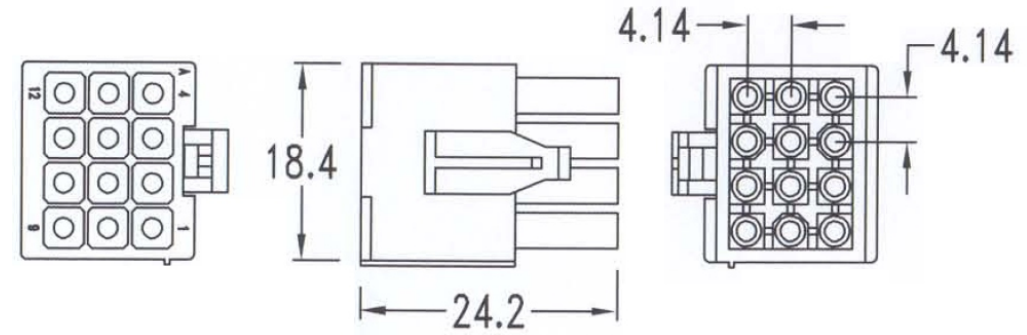
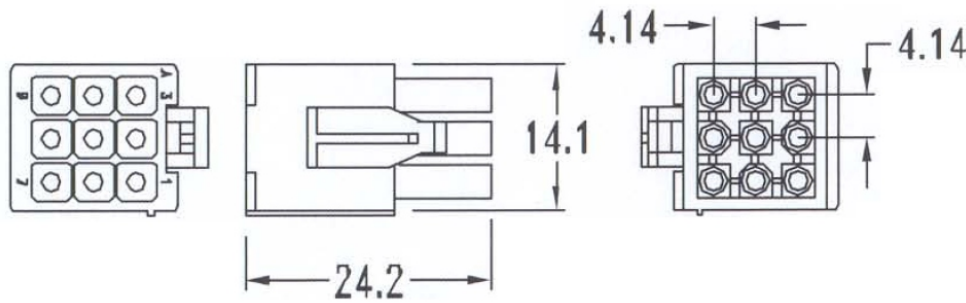
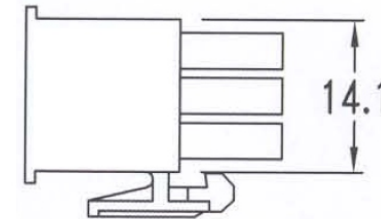


Features:

- Material: UL 94V-2 nylon 66

Specification:

- Current rating: 5A AC, DC
- Voltage rating: 300V AC, DC
- Insulation resistance: 1000M Ω Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 90°C

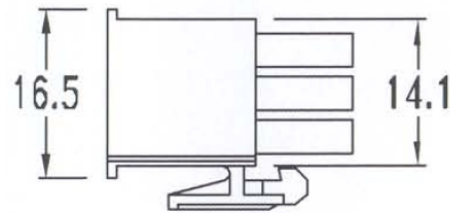

ML-S-3X03

ML-S-3X04

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, \pm
.X \pm 0.40
.XX \pm 0.25
.XXX \pm 0.08
ANG \pm

P PROJECTION

照片框

ORDER INFORMATION

ML-S-3Xxx-LF
SERIES | LEADFREE
3X03:09 WAY
3X04:12 WAY
FEMALE HOUSING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: