

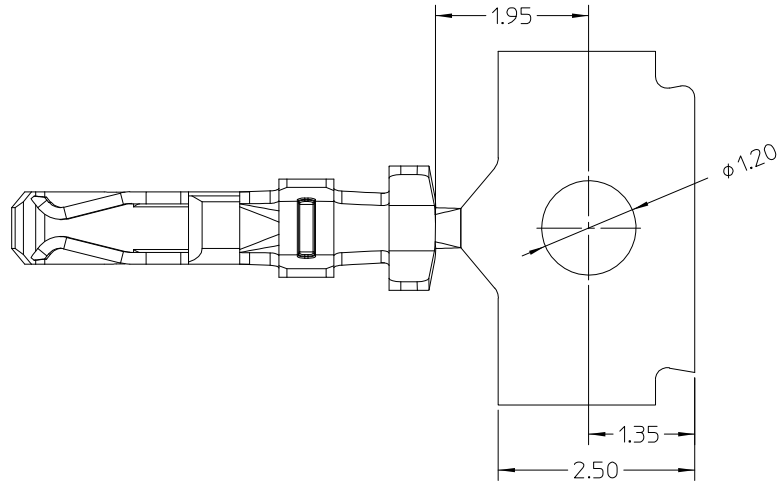





SECTION A-A

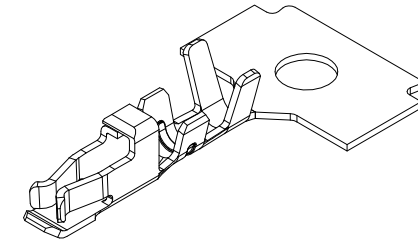

SECTION B-B

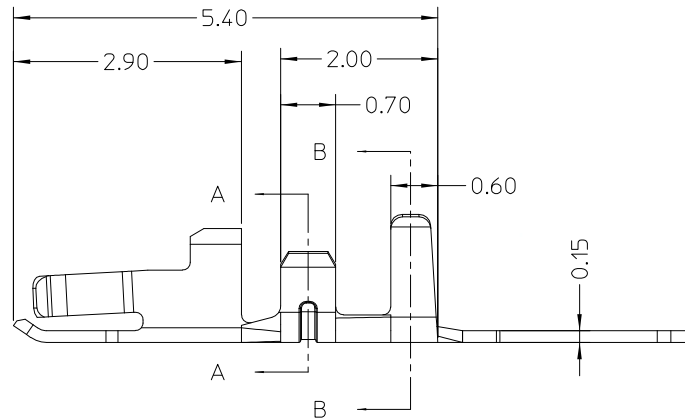

3D VIEW

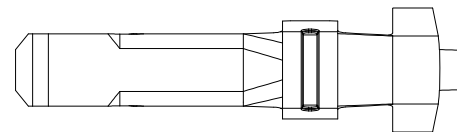

NOTES:

1. MATERIAL: COPPER ALLOY
2. TERMINAL PLATING:
PLATED ON CONTACT AREA AND CRIMP AREA SEE THE TABLE
1. 27-3.81 MICROMETERS/50-150 MICROINCH NICKEL UNDERPLATED OVER ALL GOLD FLASH
3. WIRE RANGE: 26-30AWG

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MLP125-T-26-LF

SERIES

LEADFREE

26-30 AWG

TERMINAL

DESCRIPTION: 1.25MM PITCH, 1XN CIRCUITS CRIMP TERMINAL