

Dimension Information:





Pin.No	Dim.A	Dim.B	Pin.No	Dim.A	Dim.B
4	2.54	6.60	28	33.02	37.08
6	5.08	9.14	30	35.56	39.62
8	7.62	11.68	32	38.10	42.16
10	10.16	14.22	34	40.64	44.70
12	12.70	16.76	36	43.18	47.24
14	15.24	19.30	38	45.72	49.78
16	17.78	21.84	40	48.26	52.32
18	20.32	24.38	42	50.80	54.86
20	22.86	26.92	44	53.34	57.40
22	25.40	29.46	46	55.88	59.94
24	27.94	32.00	48	58.42	62.48
26	30.48	34.54	50	60.96	65.02

Specifications:

Current Rating: 3.0A AC,DC
 Voltage Rating: 675V AC,DC
 Contact Resistance: 20m ohm.Max
 Insulation Resistance: 1000M ohm.Min
 Withstanding Voltage: 1000V AC/Minute
 Operating Temperature Range: -55°C~+125°C

Material:

Insulator: LCP(UL94V-0)
 Insulator Color: Natural Or Black
 Contact: Copper Alloy
 Plated: Gold/Matte Tin Plated/Selective Gold Plated

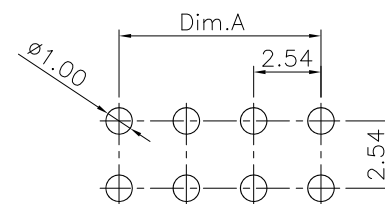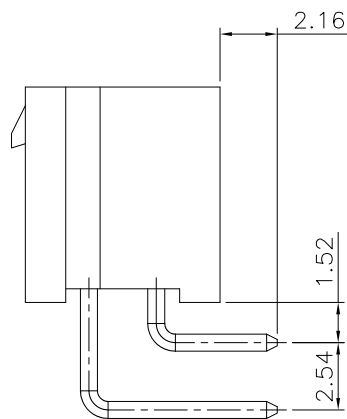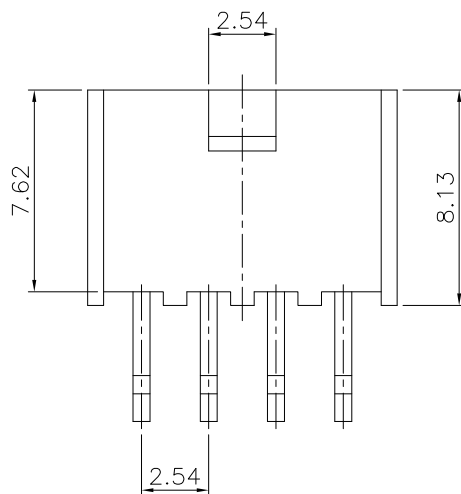

P.C.B. Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

MNM-PRXK-2Xxx-LF

SERIES | | | LEADFREE
 | | | 2X02:04WAY
 | | | 2X25:50WAY
 MALE | | | KEYWAY
 | | | NON POST
 | | | DIP 90°

DESCRIPTION: 2.54mm Wire To Board Wafer Right angle Type

煜倫股份有限公司

www.morethanall.com