
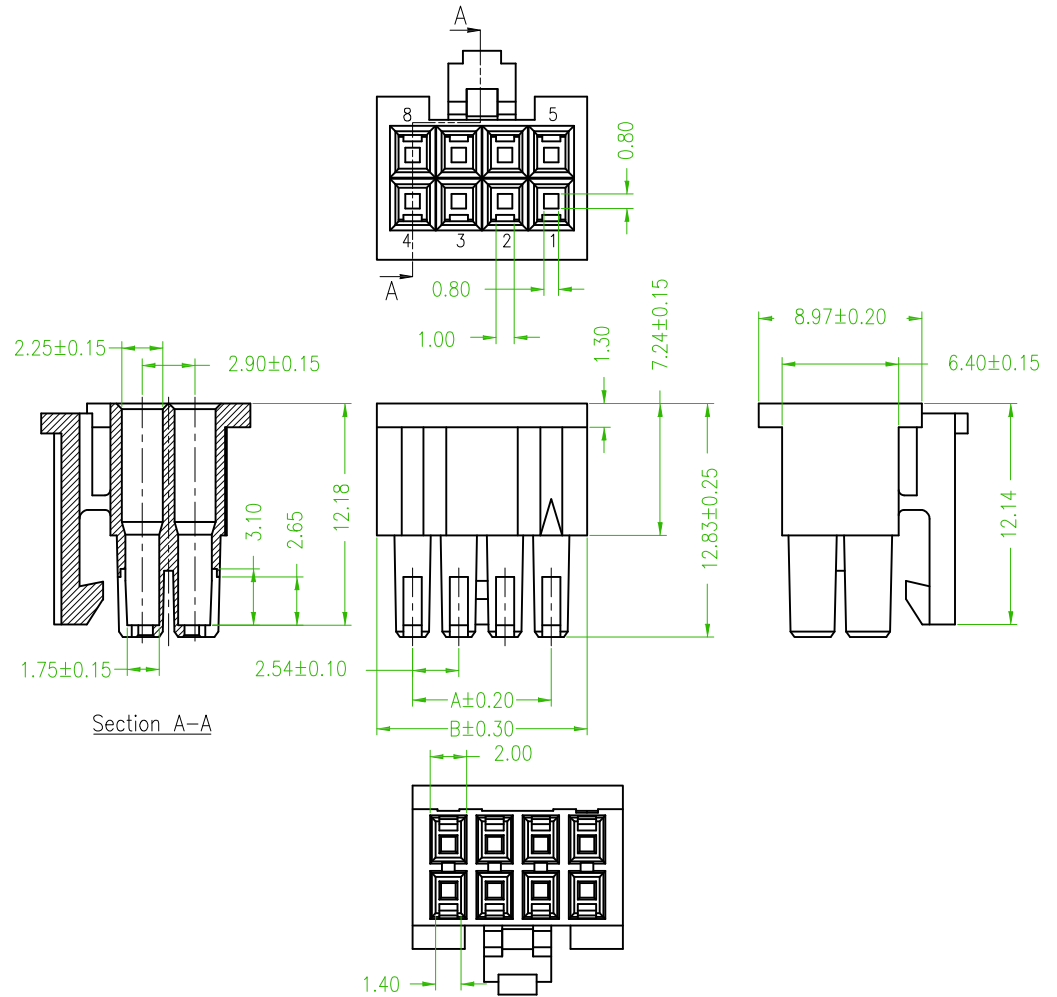


SPECIFICATIONS

Current Rating:3A AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66,UL94V-2

Part No.	Dimension	
	A	B
MNM-SH-2X02	2.54	8.26
MNM-SH-2X03	5.08	9.02
MNM-SH-2X04	7.62	11.56
MNM-SH-2X05	10.16	14.10
MNM-SH-2X06	12.70	16.64
MNM-SH-2X07	15.24	19.18
MNM-SH-2X08	17.78	21.72
MNM-SH-2X09	20.32	24.26
MNM-SH-2X10	22.86	26.80
MNM-SH-2X11	25.40	29.34
MNM-SH-2X12	27.94	31.88
MNM-SH-2X13	30.48	34.42
MNM-SH-2X14	33.02	36.96
MNM-SH-2X15	35.56	39.50
MNM-SH-2X16	38.10	42.04
MNM-SH-2X17	40.64	44.58
MNM-SH-2X18	43.18	47.12
MNM-SH-2X19	45.72	49.66
MNM-SH-2X20	48.26	52.20
MNM-SH-2X21	50.80	54.74
MNM-SH-2X22	53.34	57.28
MNM-SH-2X23	55.88	59.82
MNM-SH-2X24	58.42	62.36
MNM-SH-2X25	60.96	64.90

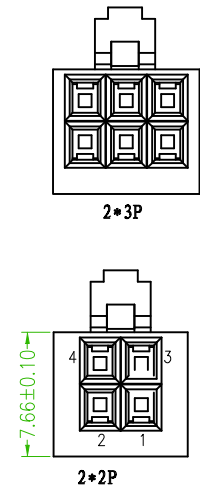

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

MNM-SH-2Xxx-LF
 SERIES | LEADFREE
 | 2X02:04 WAY
 | 2X25:50 WAY
 HOUSING
 FEMALE

DESCRIPTION: 2.54mm HOUSING