


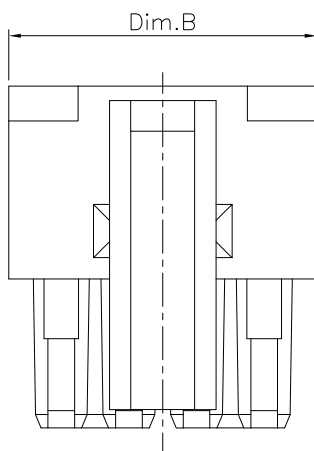

Dimension Information:





Pin.No	Dim.A	Dim.B	Pin.No	Dim.A	Dim.B
4	2.54	6.48	18	20.32	24.26
6	5.08	9.02	20	22.86	26.80
8	7.62	11.56	22	25.40	29.34
10	10.16	14.10	24	27.94	31.88
12	12.70	16.64	26	30.48	34.42
14	15.24	19.18	28	33.02	36.96
16	17.78	21.72	30	35.56	39.50

Specifications:

Current Rating: 3.0A AC,DC
 Voltage Rating: 675V AC,DC
 Contact Resistance: 20m ohm.Max
 Insulation Resistance: 1000M ohm.Min
 Withstanding Voltage: 1000V AC/Minute
 Operating Temperature Range: -40°C~+105°C

Material:

Insulator: Nylon 66(UL94V-0)
 Insulator Color: White Or Black

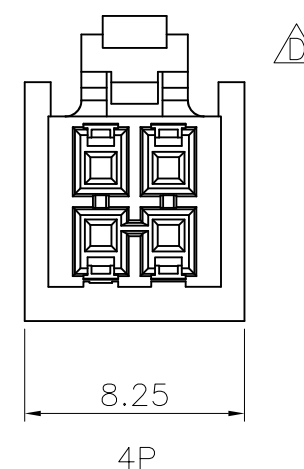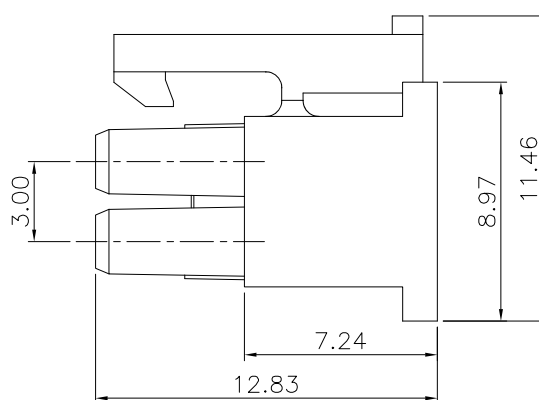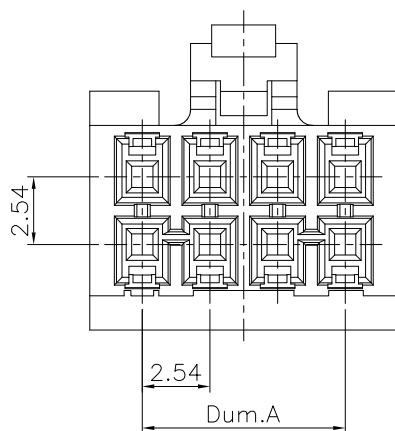

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

PPOJECTION

ORDER INFORMATION

MNM-SHK-2Xxx-LF
 SERIES | | LEADFREE
 | | 2X02:04WAY
 | | 2X15:30WAY
 | KEYWAY
 | HOUSING
 | FEMALE

DESCRIPTION: 2.54mm Wire To Board Housing