


- Material: Nylon 66, UL 94V-1
- Pitch: 2.54mm
- Poles: Single row 2-36P

SPECIFICATIONS

- Current Rating: 3A AC,DC
- Voltage Rating: 250V AC,DC
- Temperature Range: -25°C~+85°C
(including temperature rise)
- Contact Resistance: Initial Value / 10M Ω Max.
After environmental testing/30M Ω Max.
- Insulation Resistance: 500M Ω Min.
- Withstanding Voltage: 1000V AC/minute
- Applicable Wire: AWG#24-26

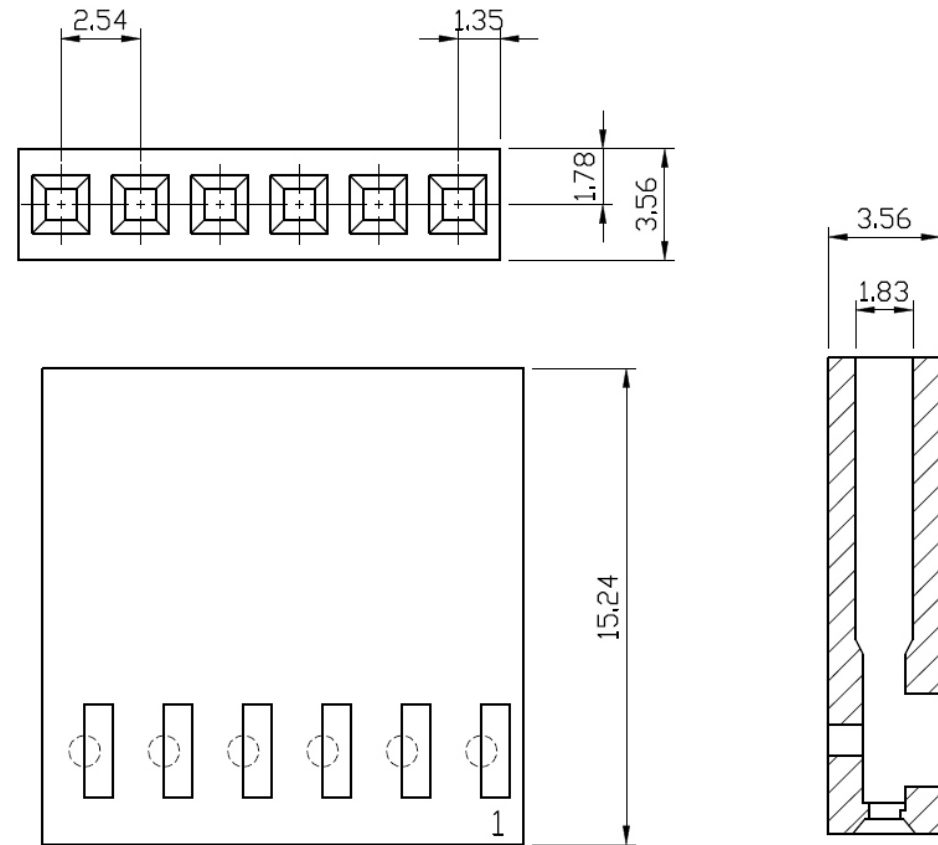

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MOD4-H-1Xxx-LF

SERIES

LEADFREE

1X02:02WAY

1X40:40WAY

HOUSING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: