
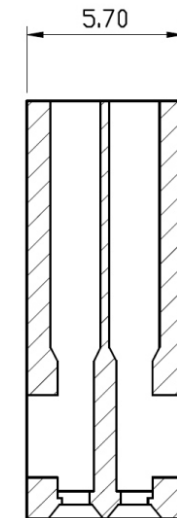
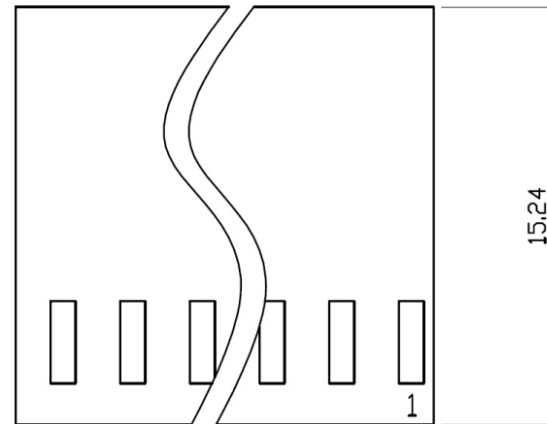


- Material: Nylon 66, UL 94V-1
- Pitch: 2.54mm
- Poles: Double row 4-80P

### SPECIFICATIONS

- Current Rating: 3A AC,DC
- Voltage Rating: 250V AC,DC
- Temperature Range: -25°C~+85°C  
(including temperature rise)
- Contact Resistance: Initial Value / 10M Ω Max.  
After environmental testing/30M Ω Max.
- Insulation Resistance: 500M Ω Min.
- Withstanding Voltage: 1000V AC/minute
- Applicable Wire: AWG#24-26

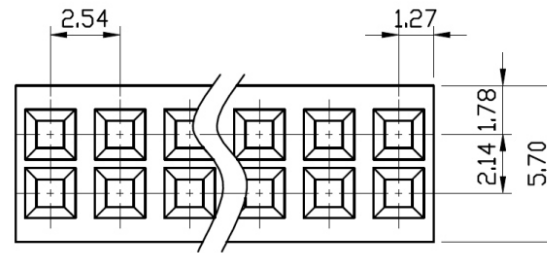

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
**煜倫股份有限公司**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



**ORDER INFORMATION**

MOD4-H-2Xxx-LF  
SERIES | LEADFREE  
2X02:04WAY  
2X40:80WAY  
HOUSING

DESCRIPTION:

[www.morethanall.com](http://www.morethanall.com)