

2.54mm F.P.C. CONNECTOR Housing

Material:

Material: NYlon66, UL 94V-0

Pole : 16~100P

SPECIFICATIONS






Current rating: 2A AC, DC

Voltage rating: 250V AC, DC

Temperature range: -25°C~+85°C

Insulation resistance: 1000m min

POSITION	"A"	"B"	POSITION	"A"	"B"
16 P	8.89	11.23	56 P	34.29	36.63
18 P	10.16	12.50	58 P	35.56	37.90
20 P	11.43	13.77	60 P	36.83	39.17
22 P	12.7	15.04	62 P	38.10	40.44
24 P	13.97	16.31	64 P	39.37	41.71
26 P	15.24	17.58	66 P	40.64	42.98
28 P	16.51	18.85	68 P	41.91	44.25
30 P	17.78	20.12	70 P	43.18	45.52
32 P	19.05	21.39	72 P	44.45	46.79
34 P	20.32	22.66	74 P	45.72	48.06
36 P	21.59	23.93	76 P	46.99	49.33
38 P	22.86	25.20	78 P	48.26	50.60
40 P	24.13	26.47	80 P	49.53	51.87
42 P	25.4	27.74	82 P	50.8	53.14
44 P	26.67	29.01	84 P	52.07	54.41
46 P	27.94	30.28	86 P	53.34	55.68
48 P	29.21	31.56	88 P	54.61	56.95
50 P	30.48	32.82	90 P	55.88	58.22
52 P	31.75	34.09	92 P	57.15	59.49
54 P	33.02	35.36	94 P	58.42	60.76
			96 P	59.69	62.03
			98 P	60.96	63.30
			100 P	62.23	64.57

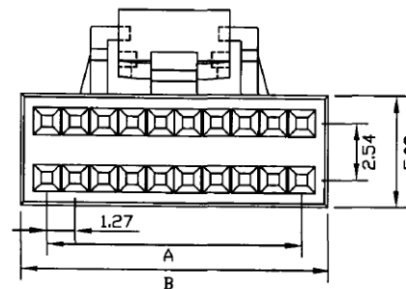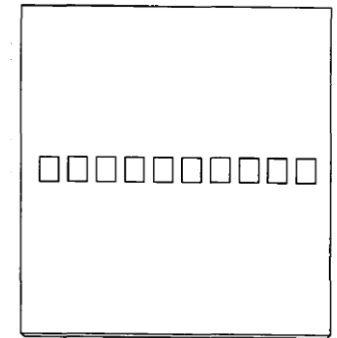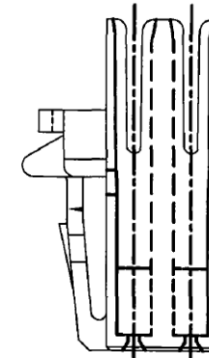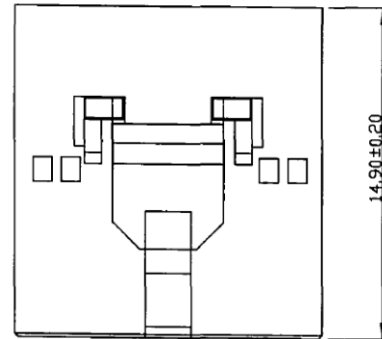

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

MOD50F-HL-2Xxx-LF

SERIES

LEADFREE

2X08:16 WAY

2X50:100 WAY

LOCK
HOUSING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: