


**1. CABLE:**

CONDUCTOR: 30 AWG SOLID SILVER PLATED OF COPPER  
 CORE: 2 SINGLES (#1-2) LAID FLAT & PARALLEL  
 DRAIN WIRE: 30AWG SOLID SILVER PLATED OF COPPER  
 SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE FACING IN  
 JACKET: 0.22mm OF PVC, COLOR-GRAY  
 DIFFERENTIAL IMPEDANCE: 150±10 OHMS @TDR  
 MUTUAL CAPACITANCE: 8.8 PF/FT NOMINAL @1KHZ  
 TIME DELAY: 1.31 ns/ft NOMINAL

2. CONNECTOR: P1, P2 HOUSING 3PIN MOLDED (NLYLON UL94V-0)  
 TERMINAL: PHOSPHOR BRONZE, 30μ" GOLD PLATING

**WIRING SCHEMATIC**

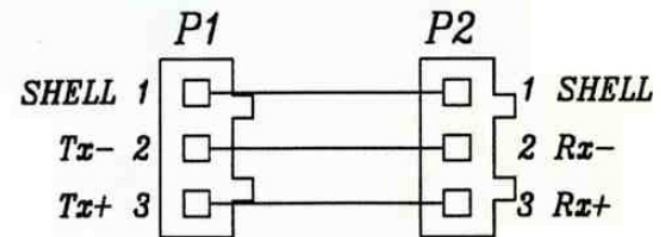

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

P PROJECTION

照片框

**ORDER INFORMATION**

MODX2-030330-F20C-LF

SERIES

LEADFREE

200mm

FEMALE TO FEMALE

30 AWG

03 TO 03 WAY

DESCRIPTION: