
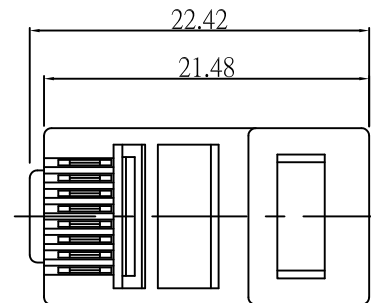
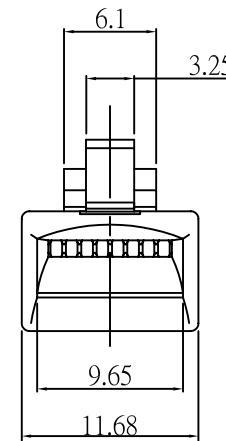
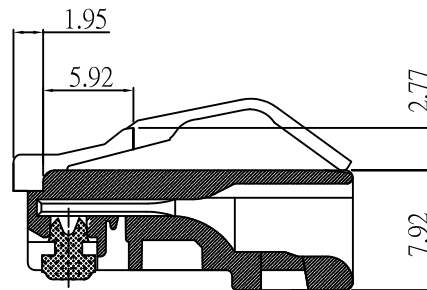



SPECIFICATION

MECHANICAL:

1. Housing Material: Polycarbonate, UL 94V-2. NO Poison
2. Material Contact: 6U" Below Brass.
15U" Above Phosphor Bronze.
3. Contact area plated gold over 3U"/6U"/15U"/
30U" and 50U", the other area plated gold over FU".
4. Contact area plated Nickel over 60U",
the other area plated Nickel over 30U".
5. Housing Color: Transparence.
6. Operation Temperature: -40°C to 80°C.

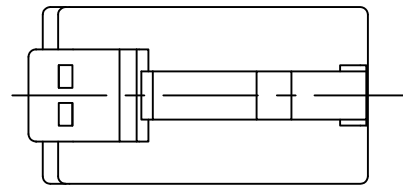

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PJECTION

照片框

ORDER INFORMATION

MP-RAL-0808-LF
SERIES | LEADFREE
8P8C
ANGLE LOCK
ROUND OUTLET

DESCRIPTION: 弧形彈片