


NOTE:

- MATERIAL:
HOUSING: LCP WITH 30% GF, UL 94V-0, COLOR BLACK.
CONTACTS: PHOSPHOR BRONZE.
PEGS: BRASS
- FINISH:
CONTACTS: GOLD FLASH OVER 1.27mm [50m"] MIN.
NICKEL ON ENTIRE CONTACT.
PEGS: 3.048mm [120m"] MIN. MATTE-TIN OVER 1.27mm [50m"] MIN. NICKEL.

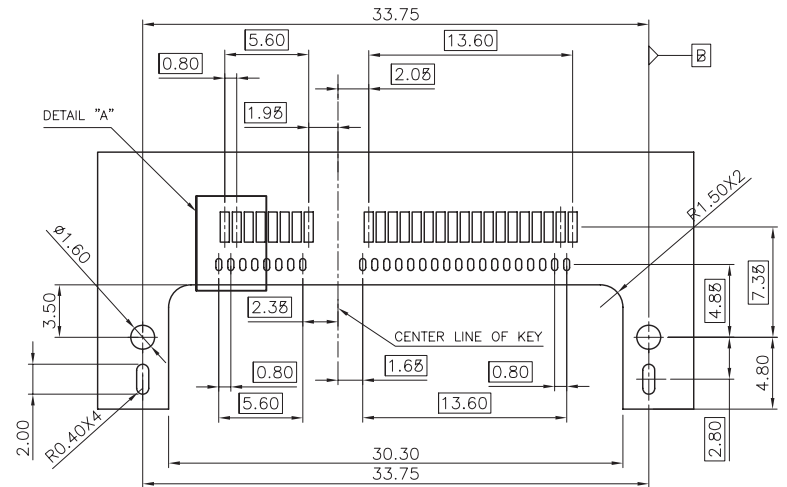

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50
X. ± 0.30
.XX ± 0.20
.XXX ± 0.15
ANG ± 3°

PJECTION








照片框

ORDER INFORMATION

MPCI-W17R-052-LF

SERIES 90°SMT REEL 52 WAY LEADFREE
HIGH 1.7mm

DESCRIPTION: MINI PCI EXPRESS 0.80MM PITCH
H=1.7MM REVERSE CONNECTOR

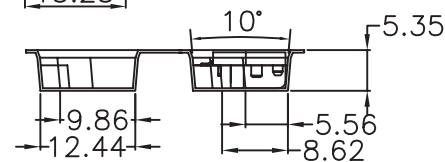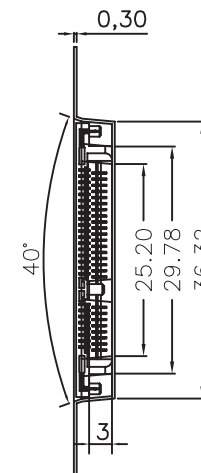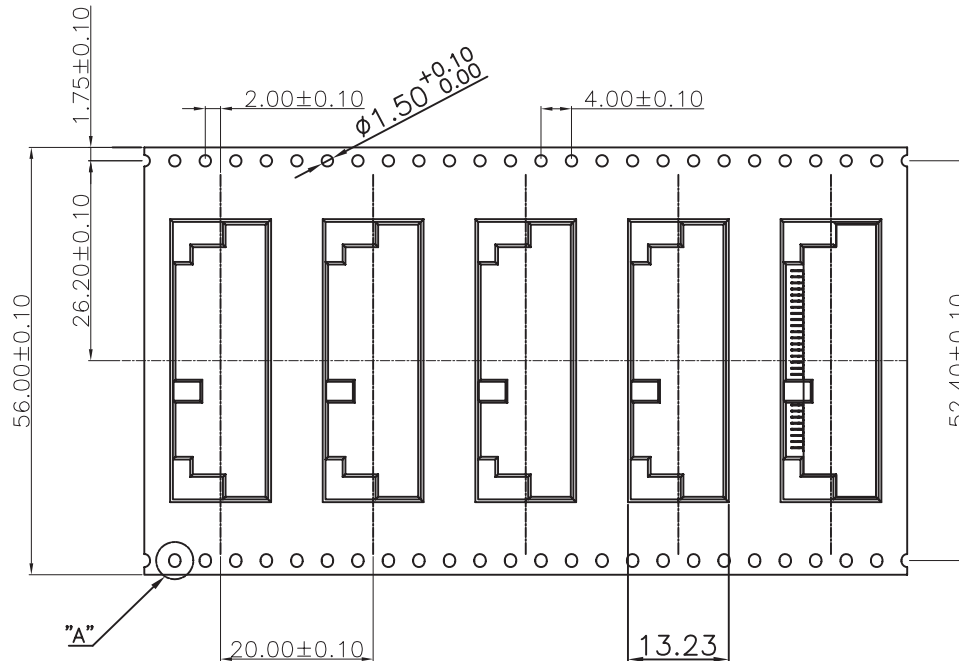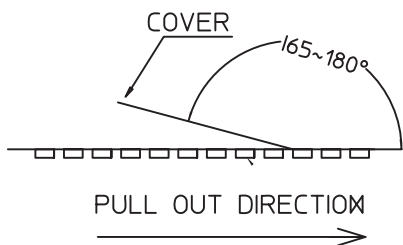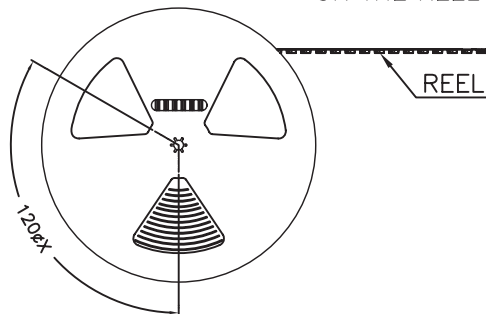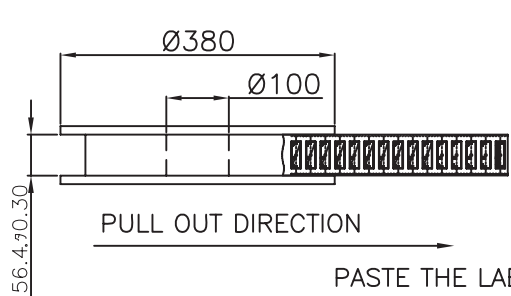

PEELING SPEED	300mm/MIN±0.10mm/MIN
FROCE	30gf~100gf

1. 10 sprocket hole pitch cumulative tolerance ±0.20 .
2. Carrier camber is within 1 mm in 250mm.
3. Material :Transparent conductive polystyrene Alloy
4. All dimensions meet EIA-481-C requirements.
5. Thickness : 0.35±0.05mm.
6. Packing length per 15" X100 reel :16.8 Meters.
7. Component load per Ø15" reel :800 pcs.

4000PCS	800	5	XX KG	XX KG
QUANTITY	PCS/ TAPE	REELS/ BOX	G/W(Kg)	N/W(Kg)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1

DATE

SIZE A4

X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.15
ANG ± 3°

PJECTION

照片框

ORDER INFORMATION

MPCI-W17R-052-LF



DESCRIPTION: MINI PCI EXPRESS 0.80MM PITCH
H=1.7MM REVERSE CONNECTOR