
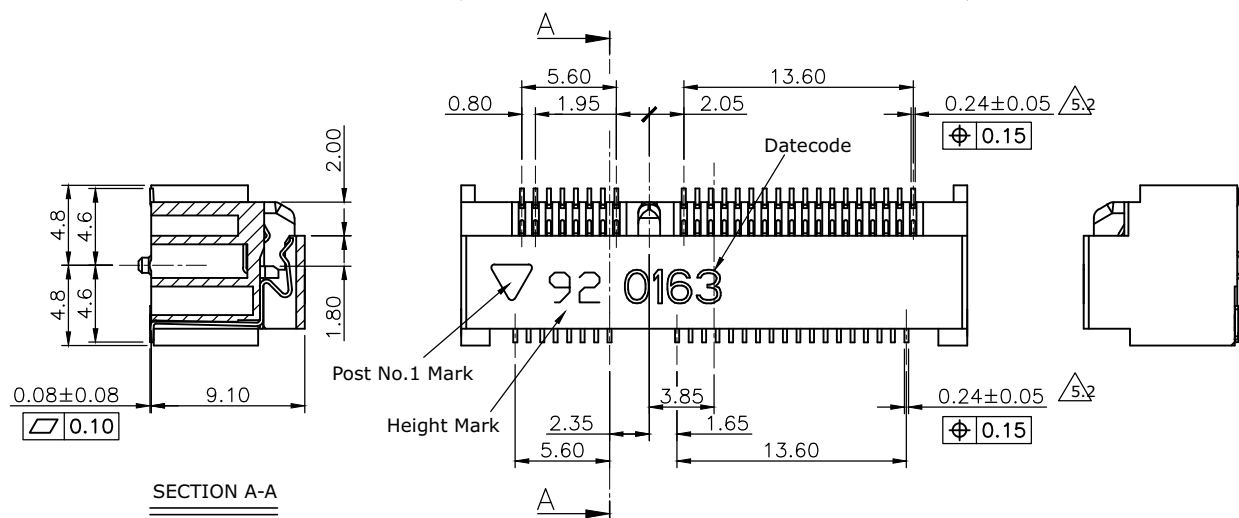
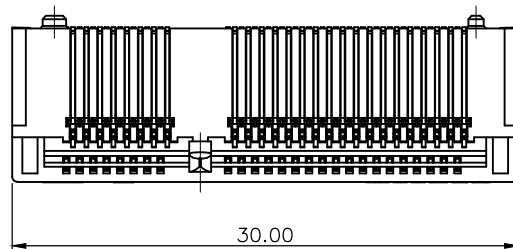


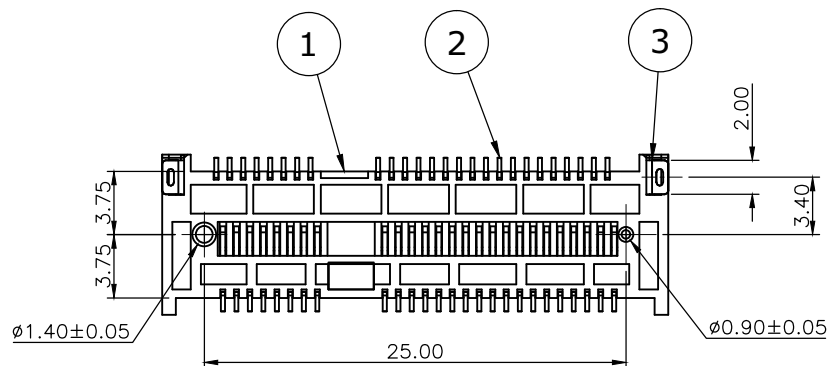

SECTION A-A

SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 0.5A per pin
- 1.2 Voltage Rating: 50V AC
- 1.3 Contact Resistance: 55 Max
- 1.4 Insulation Resistance: 500M Min
- 1.5 Dielectric Withstanding Voltage: 300VAC

2. MECHANICAL

- 2.1 Durability: 50 Cycles
- 2.2 Total Mating/Unmating Force: 2.3Kgf max.

3. ENVIRONMENTAL

- 3.1 Operating temperature range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 3.2 Storage temperature range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

4. SOLDER ABILITY

- 4.1 Recommended IR-Reflow Temperature: $260^{\circ}\text{C} \pm 10^{\circ}\text{C}$

3	HOLDDOWN	Brass, Tin plated under nickel plating
2	CONTACT	Phosphor Bronze, contact area: G/F solder area: Tin, under plating Nickel
1	HOUSING	LCP UL94V-0, Black
NO.	PART NAME	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION



X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

MPCI-W92-052-LF
SERIES T LEADFREE
52 WAY
HIGH 9.2mm
90°SMT

DESCRIPTION: Mini PCI Express Socket H:9.2mm

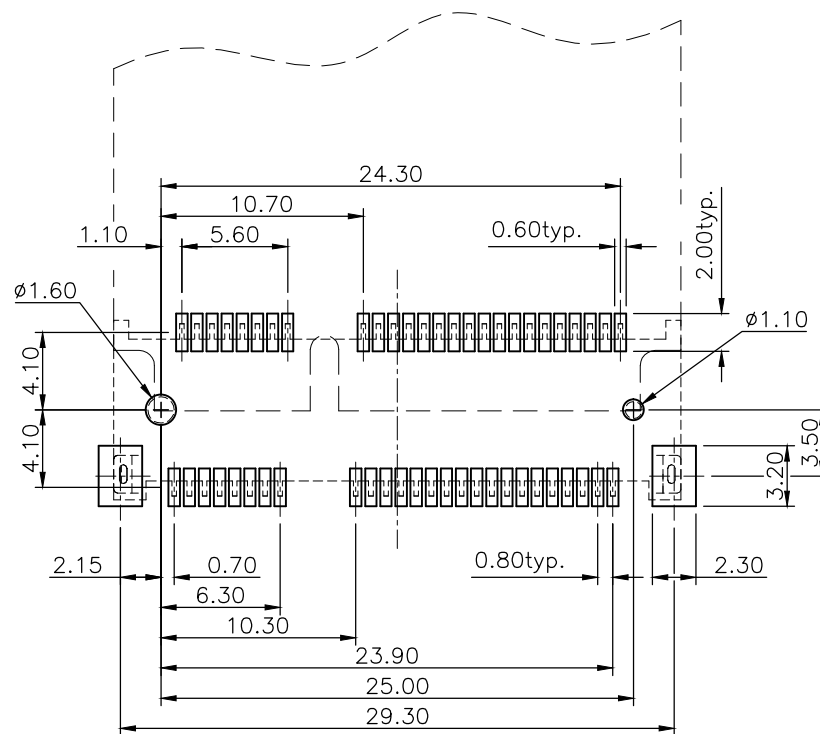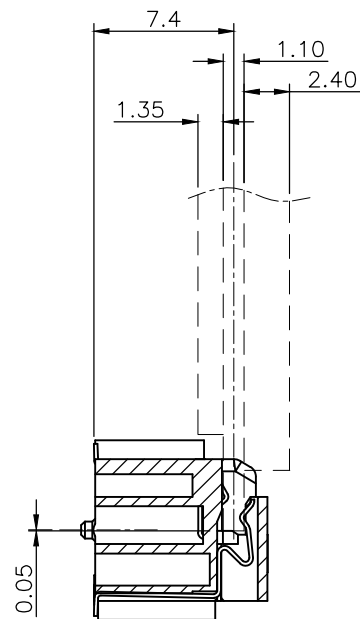

--- CARD
--- PAD LAYOUT

RECOMMEND LAYOUT (TOP VIEW)

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X.±

UNIT / mm

SCALE 1 : 1

.XX.±

DATE

.XXX.±

ANG.±

SIZE A4

PPOJECTION




ORDER INFORMATION

MPCI-W92-052-LF
SERIES | LEADFREE
52 WAY
HIGH 9.2mm
90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Mini PCI Express Socket H:9.2mm

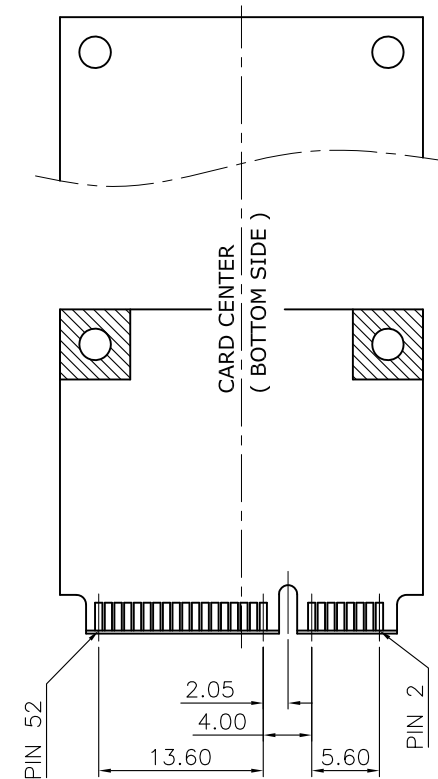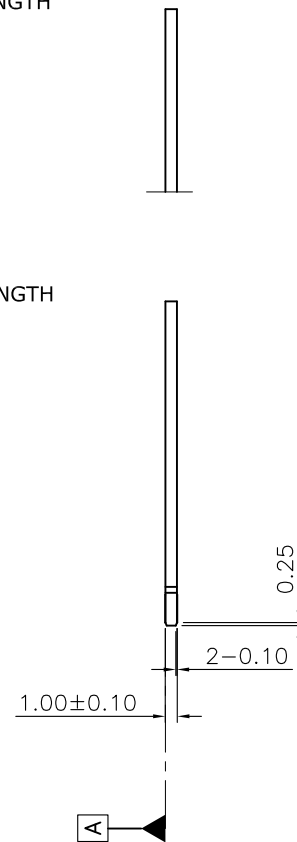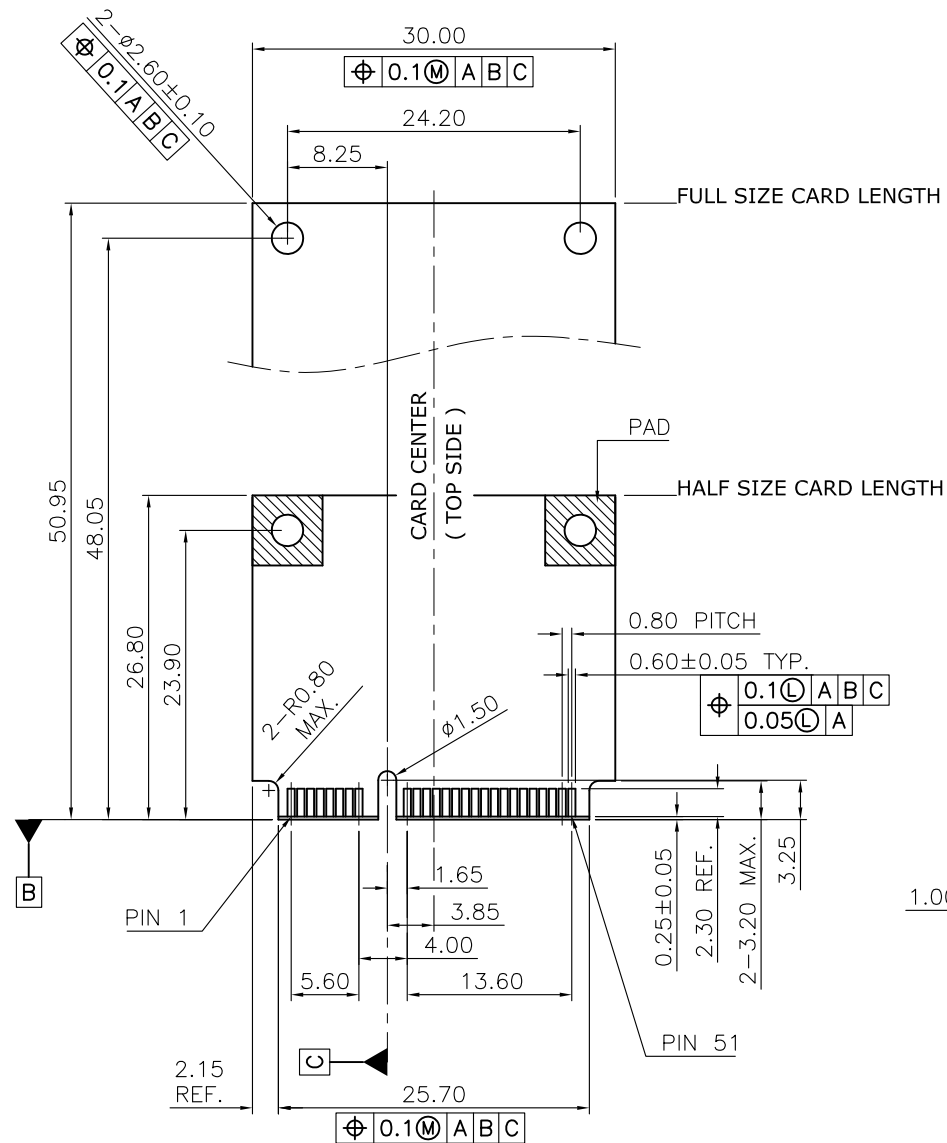

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MPCI-W92-052-LF
SERIES T LEADFREE
52 WAY
HIGH 9.2mm
90°SMT

DESCRIPTION: Mini PCI Express Socket H:9.2mm

