

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)


Standard: PBT

Note:

10P~12P With Slot "N",Without Slot "M"

14P~50P With Slot "M" and "N"

Pin	Dimension mm			
	A	B	C	D
10	16.65	8.00	11.65	15.00
12	18.65	10.00	13.65	17.00
14	20.65	12.00	15.65	19.00
16	22.65	14.00	17.65	21.00
18	24.65	16.00	19.65	23.00
20	26.65	18.00	21.65	25.00
22	28.65	20.00	23.65	27.00
24	30.65	22.00	25.65	29.00
26	32.65	24.00	27.65	31.00
30	36.65	28.00	31.65	35.00
34	40.65	32.00	35.65	39.00
40	46.65	38.00	41.65	45.00
44	50.65	42.00	45.65	49.00
50	56.65	48.00	51.65	55.00

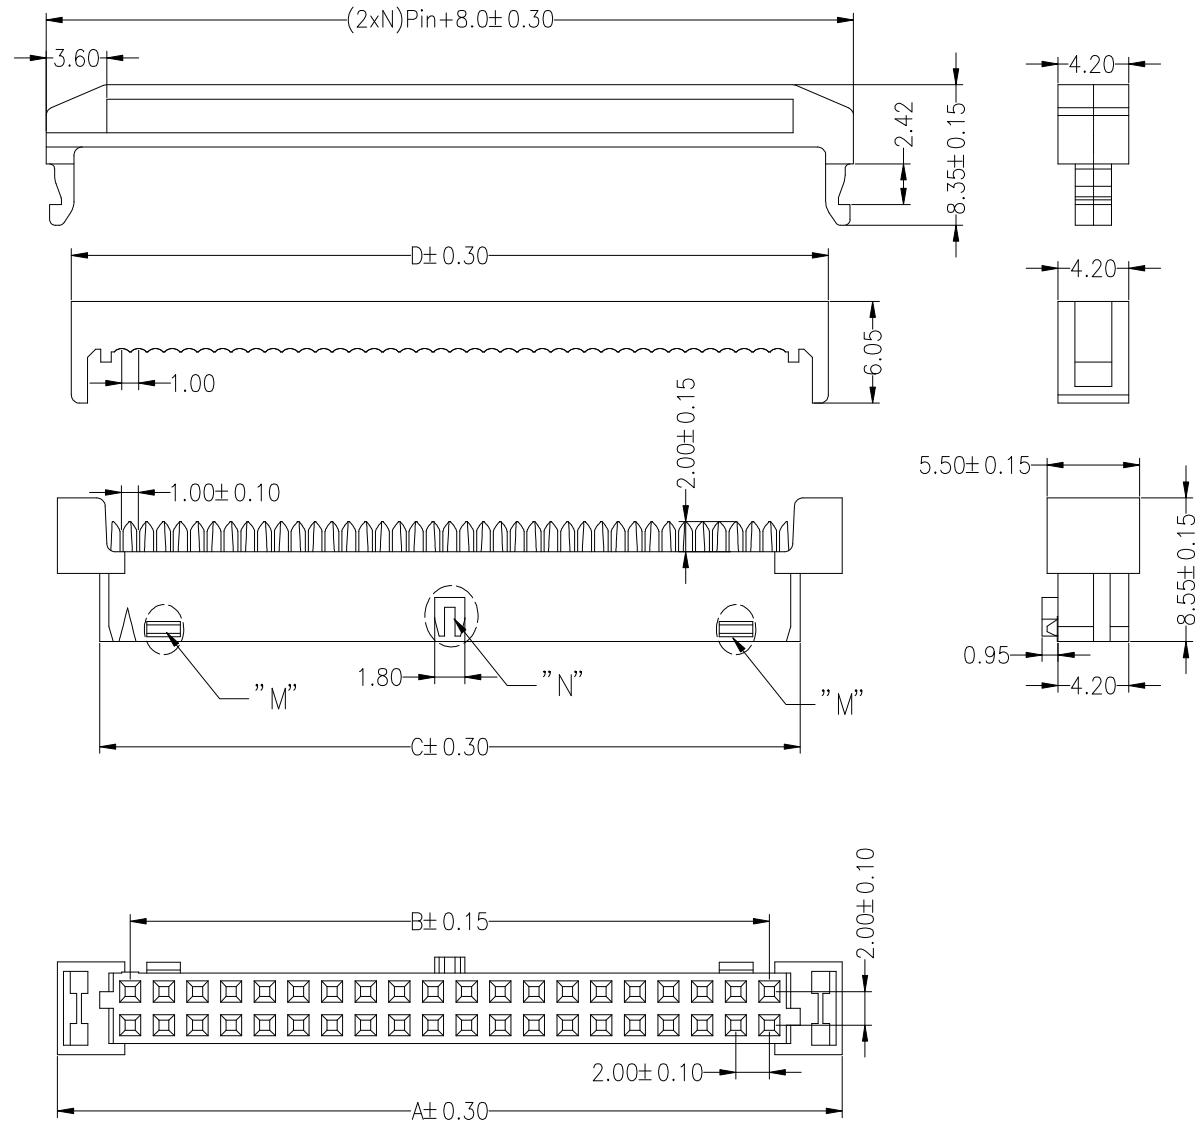

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ± 3°

照片框

ORDER INFORMATION

MPVK-C2-2Xxx-LF

SERIES

LEADFREE

2X05:10WAY

2X25:50WAY

TWO TYPE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: