
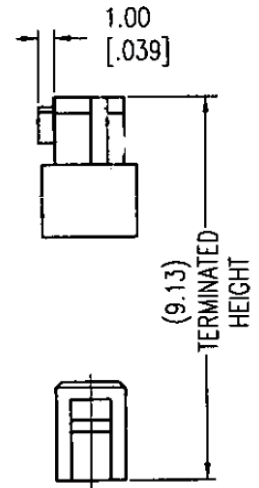
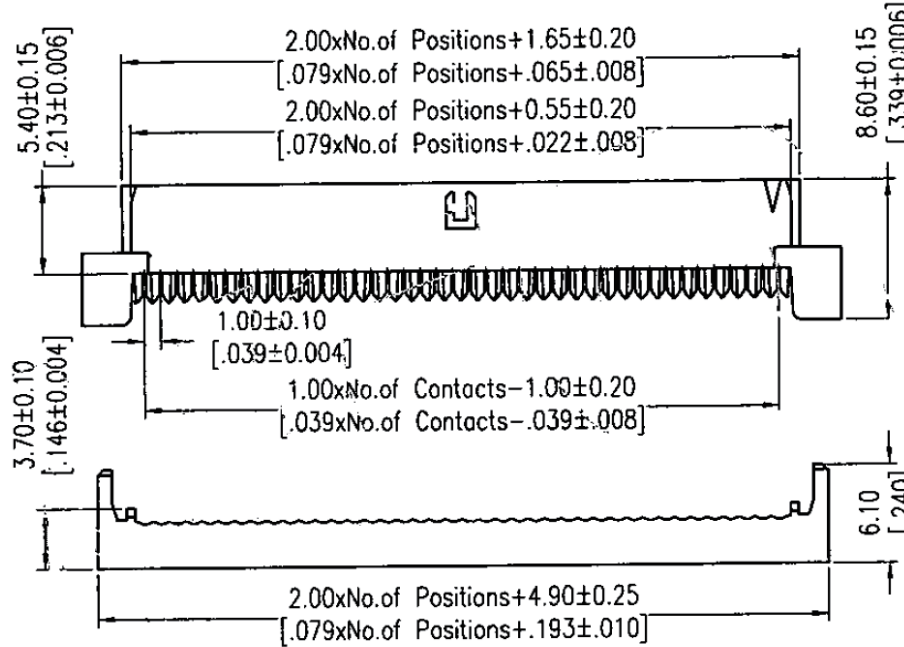
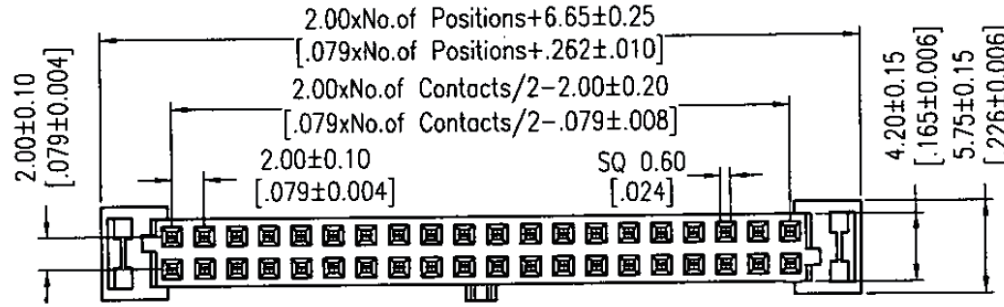


NOTES:

Rated Current:1.0AMP
 Contact Resistance:30mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze
 Contact Plating:Au Over Ni
 Insulator Material:PBT+30%G.F UL94V-0

POLARIZATION ONLY 
 (APPLICABLE FOR 14 TO 50 CKT)



RoHS Compliant

TOLERANCES ARE

X, ±
 .X ± 0.40
 .XX ± 0.25
 .XXX ± 0.15
 ANG ± 3°

照片框

ORDER INFORMATION

MPVK-C2A-2Xxx-LF
 SERIES | LEADFREE
 2X07:14WAY
 2X25:50WAY
 TWO TYPE

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PJECTION 