

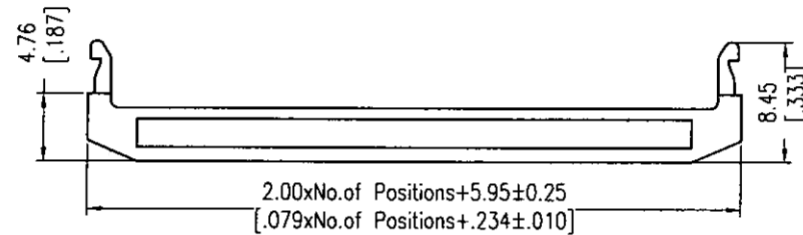
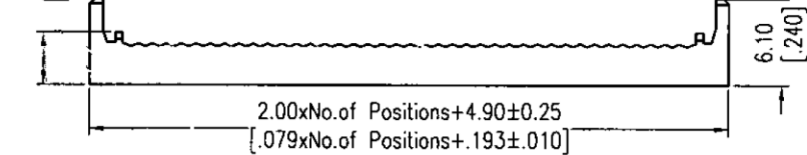
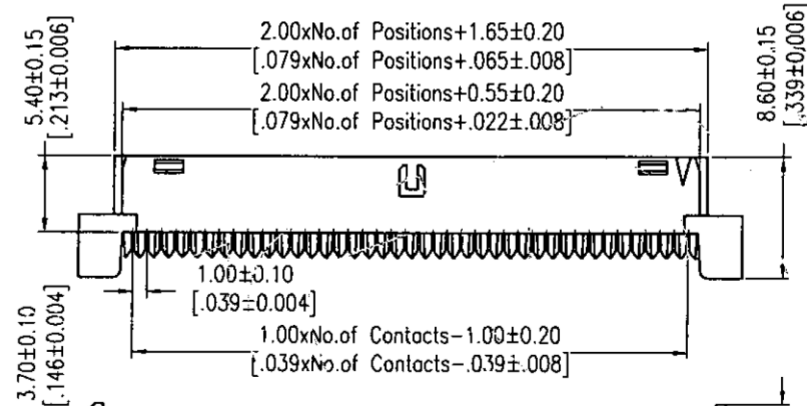


NOTES:
 Rated Current:1.0AMP
 Contact Resistance:30mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +105℃



Contact Material:Phosphor Bronze
 Contact Plating:Au Over Ni
 Insulator Material:PBT+30%G.F UL94V-0

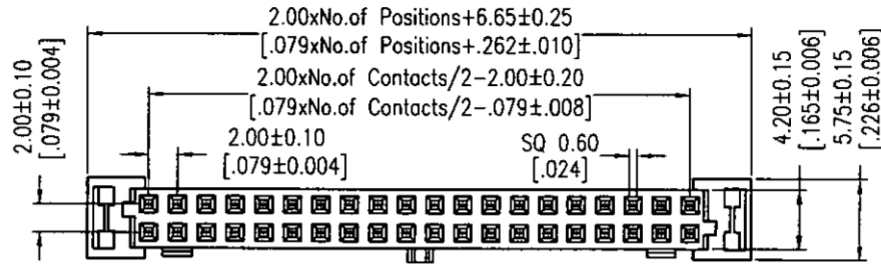

SINGLE RAMP LOCKING ONLY
 (APPLICABLE FOR 10 TO 12 CKT)



POLARIZATION AND RAMP LOCKING
 (APPLICABLE FOR 14 TO 50 CKT)

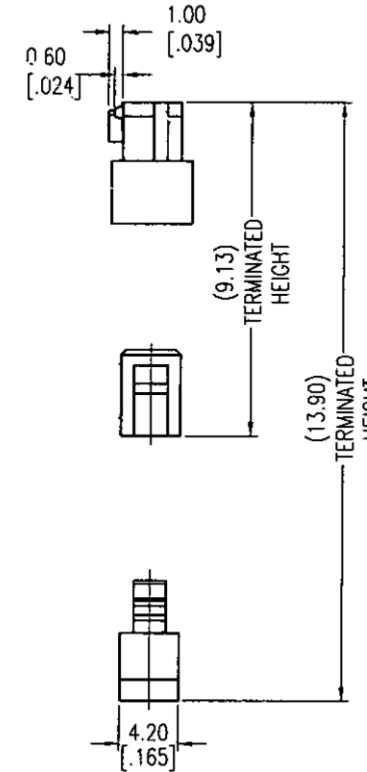

CONTACT VIEW

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE

SIZE A4

X, ±
 .X ± 0.40
 .XX ± 0.25
 .XXX ± 0.15
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

MPVK-C3-2Xxx-LF

SERIES

LEADFREE

2X07:14WAY

2X25:50WAY

THREE TYPE

DESCRIPTION: