
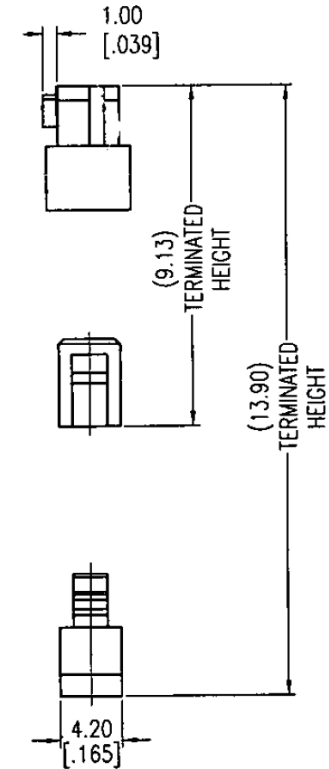
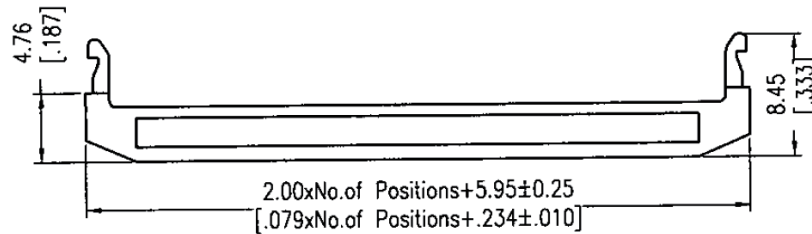
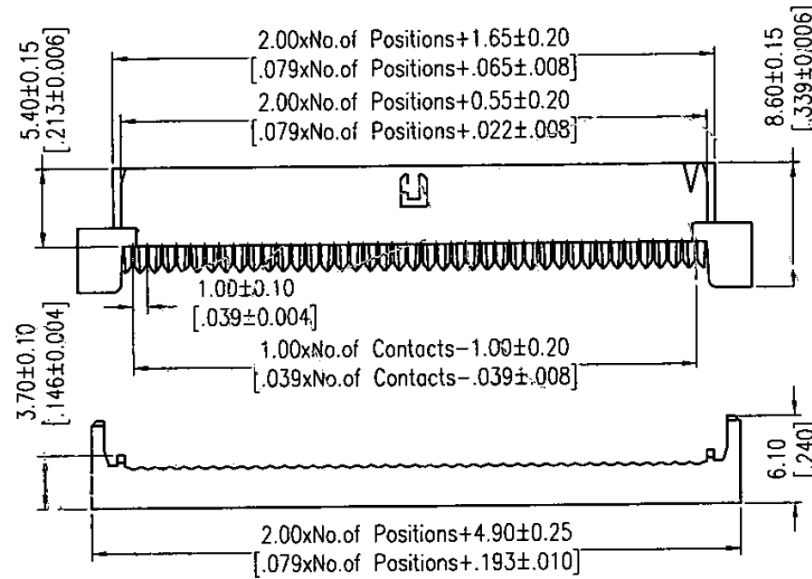
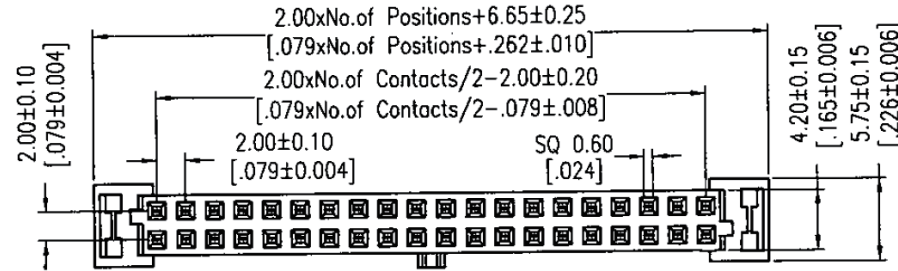


**NOTES:**

Rated Current:1.0AMP  
 Contact Resistance:30mΩ max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze  
 Contact Plating:Au Over Ni  
 Insulator Material:PBT+30%G.F UL94V-0

POLARIZATION ONLY   
 (APPLICABLE FOR 14 TO 50 CKT)



**RoHS Compliant**

TOLERANCES ARE

X, ±  
 .X ± 0.40  
 .XX ± 0.25  
 .XXX ± 0.15  
 ANG ± °

照片框

**ORDER INFORMATION**

MPVK-C3A-2Xxx-LF  
 SERIES | LEADFREE  
 2X07:14WAY  
 2X25:50WAY  
 THREE TYPE

DESCRIPTION:

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION 