


- * Material:PBT UL 94V-0 with 30%GF
- * Contact:0.50mm brass,Gold plated.

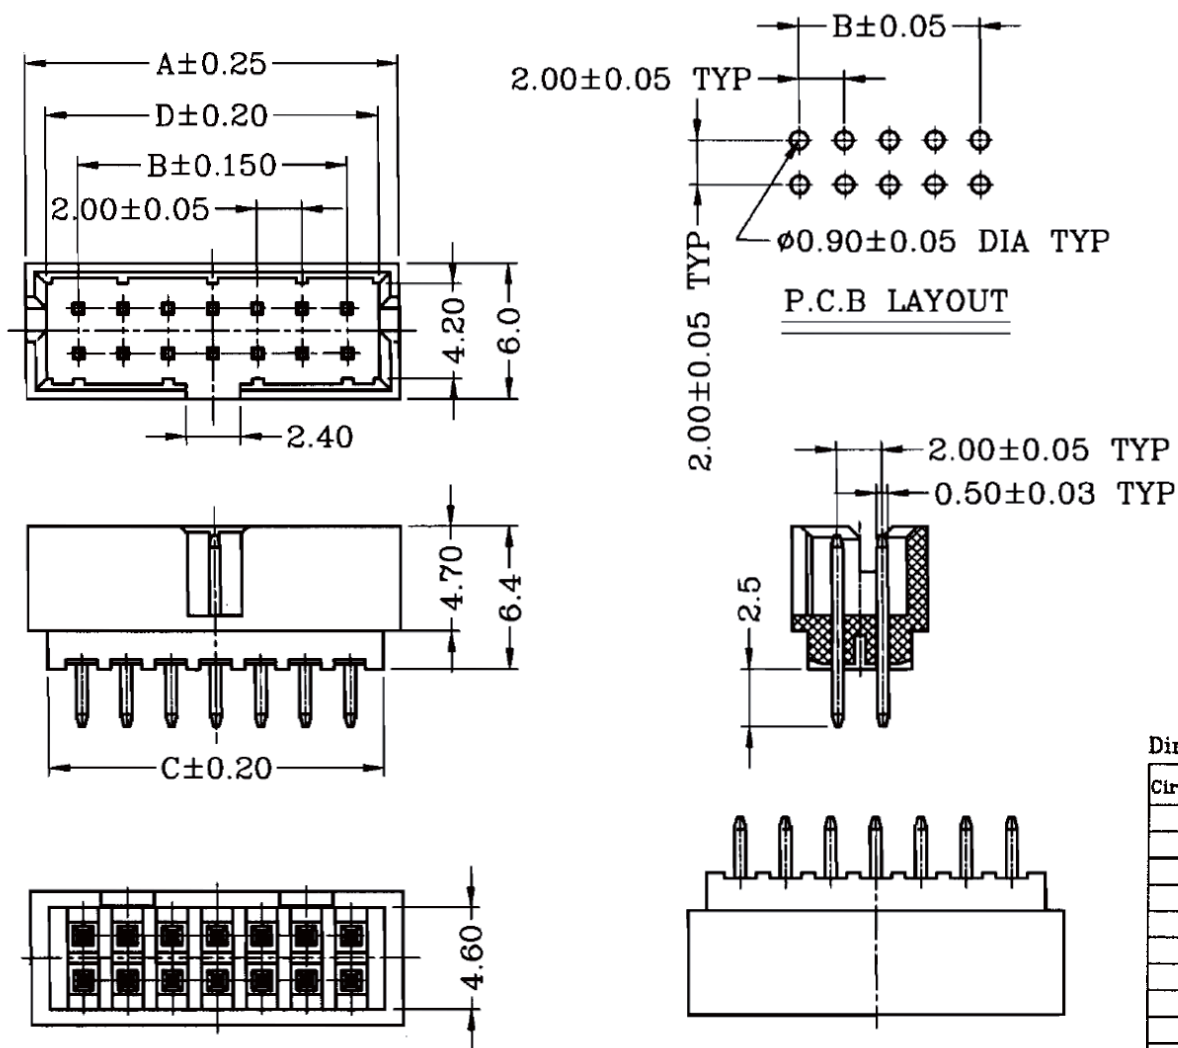

Dimensional & Ordering Information:

Circuits	Dimensions				Pcs/Bag	Circuits	Dimensions				Pcs/Bag
	A	B	C	D			A	B	C	D	
14	18.65	12.00	15.0	14.85	1000	34	38.65	32.00	35.0	34.85	500
16	18.65	14.00	17.0	16.85		36	38.85	34.00	37.0	36.85	
18	20.65	16.00	19.0	18.85		38	40.65	36.00	39.0	38.85	
20	22.65	18.00	21.0	20.85		40	42.65	38.00	41.0	40.85	
22	24.65	20.00	23.0	22.85		42	44.65	40.00	43.0	42.85	
24	26.65	22.00	25.0	24.85		44	46.65	42.00	45.0	44.85	
26	28.65	24.00	27.0	26.85		46	48.65	44.00	47.0	46.85	
28	30.65	26.00	29.0	28.85		48	50.65	46.00	49.0	48.85	
30	32.65	28.00	31.0	30.85		50	52.65	48.00	51.0	50.85	
32	34.65	30.00	33.0	32.85							

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MPVK-DA-2Xxx-LF

SERIES LEADFREE
2X07:14WAY
2X25:50WAY
KEY WAY
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: