

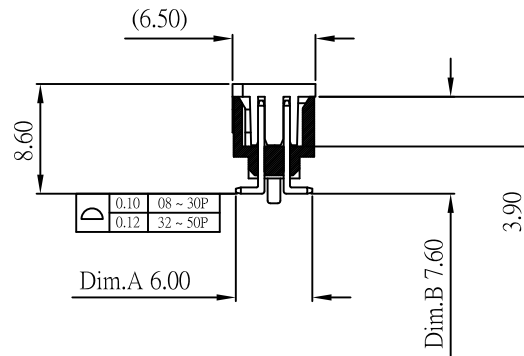



08~20 pin : 0.10mm
22~50 pin : 0.20mm

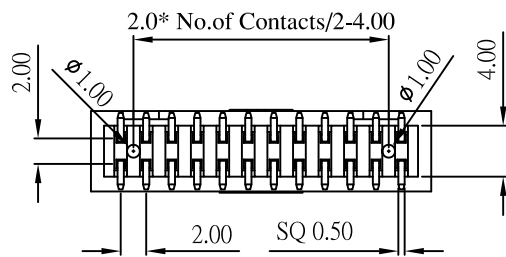

08,10,12 pin



Recommended P.C. Board
SMD Layout

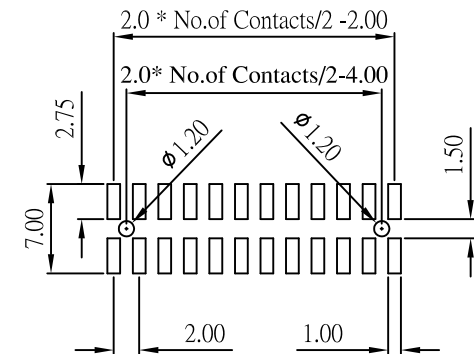

①: Table-1

08 pin	20 pin	32 pin
10 pin	22 pin	34 pin
12 pin	24 pin	40 pin
14 pin	26 pin	44 pin
16 pin	30 pin	50 pin

Current Rating and Voltage: 2 Amps 250V AC (r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy
Standard: Brass
Insulator Material: High Temperature
Plastic, UL 94V-0
Finish: Standard: Gold Flash all over

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PJECTION



ORDER INFORMATION

MPVK-VPC-2Xxx-LF

SERIES

LEADFREE

2X04 :08WAY

2X25 :50WAY

CAP
POST

180°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: