

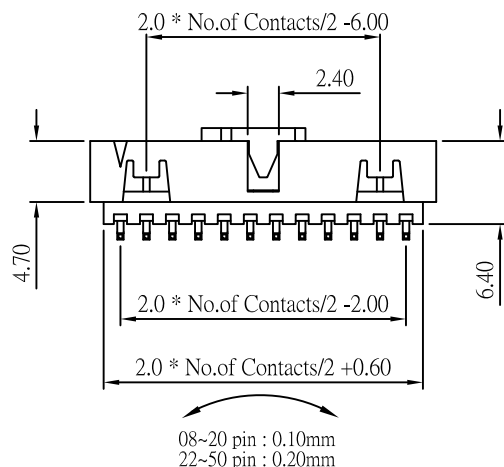
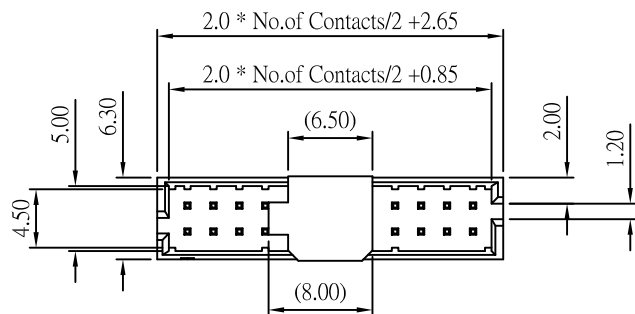


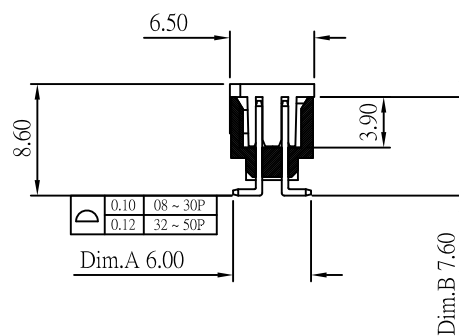


08~20 pin : 0.10mm
22~50 pin : 0.20mm

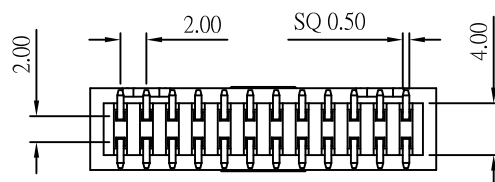


©: DIMENSIONS

08 pin	20 pin	32 pin
10 pin	22 pin	34 pin
12 pin	24 pin	40 pin
14 pin	26 pin	44 pin
16 pin	30 pin	50 pin

Current Rating and Voltage: 2 Amps 250V AC (r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy
Standard: Brass
Insulator Material: High Temperature
Plastic,UL 94V-0
Finish: Standard: Gold Flash all over



Recommended P.C. Board
SMD Layout

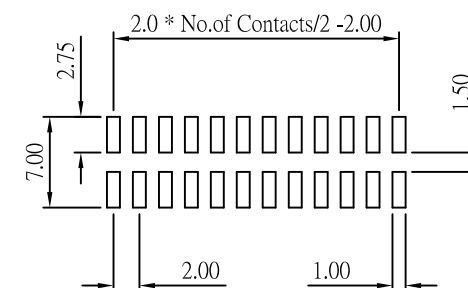

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MPVK-VXS30CR-2Xxx-LF

SERIES

180°SMT

NON POST

REEL

CAP

SEMI GOLD 30u"

LEADFREE
2X04 :08WAY
2X25 :50WAY


DESCRIPTION:

NOTE:



- 1.10 sprocket hole pitch cumulative tolerance±0.2
- 2.Carrier camber is 1mm in 100mm
- 3.A0 and B0 measured on a plane 0.3mm above the bottom of the pocket
- 4.K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier
- 5.All dimensions meet EIA-481-2 requirements
- 6. 22" 1R= 21M 1200 PCS 13"1R= 7M 400PCS

DEVICE TYPE:
MATERIAL :PS0.4黑色




ITEM	A0	K0	K1	P	E	D	P0	P2
DIM	6.3 ^{+0.1} _{-0.1}	9.9 ^{+0.1} _{-0.1}	8.8 ^{+0.1} _{-0.1}	16 ^{+0.1} _{-0.1}	1.75 ^{+0.1} _{-0.1}	1.5 ^{+0.1} _{-0.0}	4.0 ^{+0.1} _{-0.1}	2.0 ^{+0.1} _{-0.1}



TAPE TYPE 1 : FOR POSITION NUMBERS
04 THRU 10(TAPE WIDTH < 32mm)

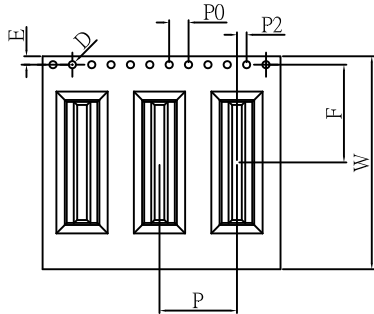


TAPE TYPE 2 : FOR POSITION NUMBERS
12 AND ABOVE(TAPE WIDTH ≥ 32mm)

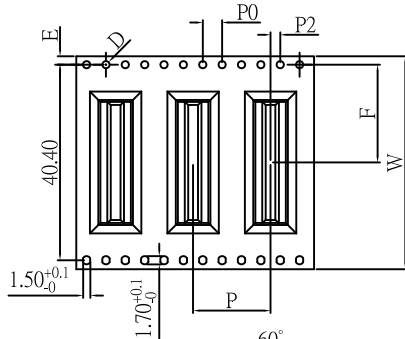

CIRCUITS	W	B0	F	CIRCUITS	W	B0	F
08 pin	32.0	11.0	14.2	30 pin	44.0	33.0	20.2
10 pin	32.0	13.0	14.2	32 pin	56.0	35.0	26.2
12 pin	32.0	15.0	14.2	34 pin	56.0	37.0	26.2
14 pin	32.0	17.0	14.2	36 pin	56.0	39.0	26.2
16 pin	32.0	19.0	14.2	38 pin	56.0	41.0	26.2
18 pin	44.0	21.0	20.2	* 40 pin	56.0	43.0	26.2
20 pin	44.0	23.0	20.2	42 pin	72.0	45.0	34.2
* 22 pin	44.0	25.0	20.2	44 pin	72.0	47.0	34.2
24 pin	44.0	27.0	20.2	46 pin	72.0	49.0	34.2
26 pin	44.0	29.0	20.2	48 pin	72.0	51.0	34.2
28 pin	44.0	31.0	20.2	50 pin	72.0	53.0	34.2

Dimension							Carrier Tape
A	B±0.5	C±0.2	D±1.0	N±1.0	T±0.1	G±0.1	W
330	2.2	13	20.2	100	8.5	13.1	8
330	2.2	13	20.2	100	12.5	17.1	12
330	2.2	13	20.2	100	17	21.1	16
330	2.2	13	20.2	100	24.5	29.1	24
330	2.2	13	20.2	100	32.5	37.0	32
330	2.2	13	20.2	100	44.5	49.1	44
330	2.2	13	20.2	100	56.5	61.1	56
330	2.2	13	20.2	100	72.5	77.1	72
330	2.2	13	20.2	100	88.5	93.1	88

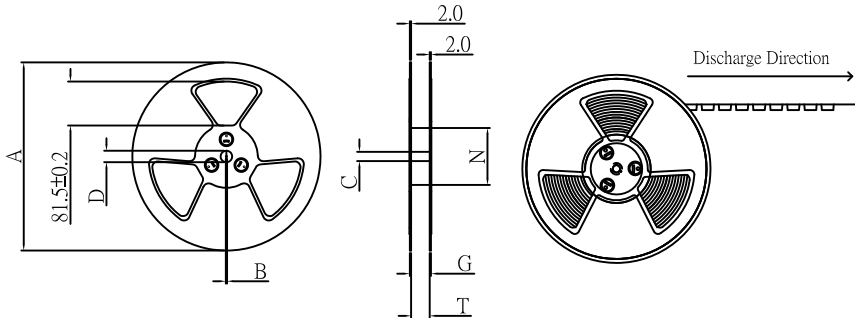

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

MPVK-VXS30CR-2Xxx-LF

SERIES

180°SMT

NON POST

LEADFREE

2X04 :08WAY

2X25 :50WAY

REEL

CAP SEMI GOLD 30u"

DESCRIPTION: