

MATERIAL

Insulator : PBT+30%Glass fiber

Contact Pin : Brass




SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

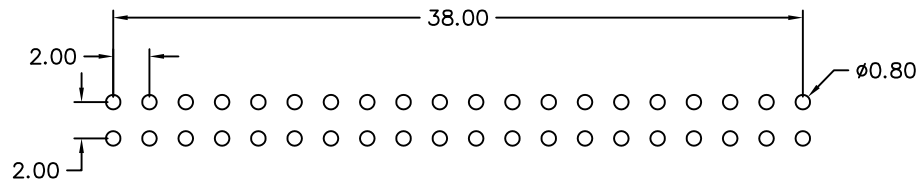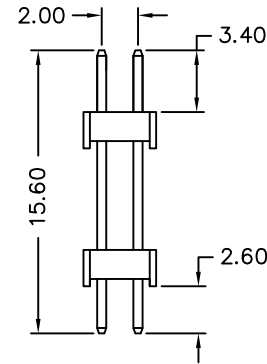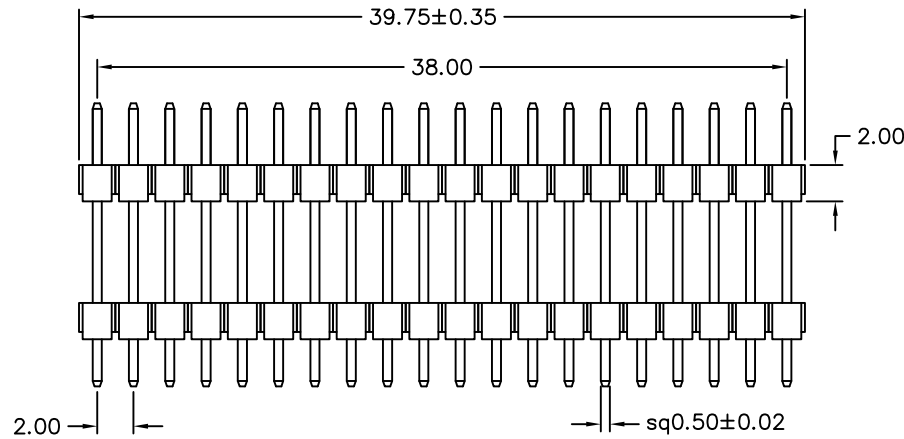

Recommended P.C.B Layout



煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X ±

.X ± 0.30

.XX ± 0.20


.XXX ±

ANG ± 3°

PJECTION

照片框

ORDER INFORMATION

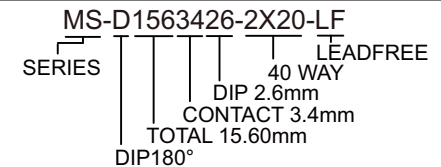

DESCRIPTION: