

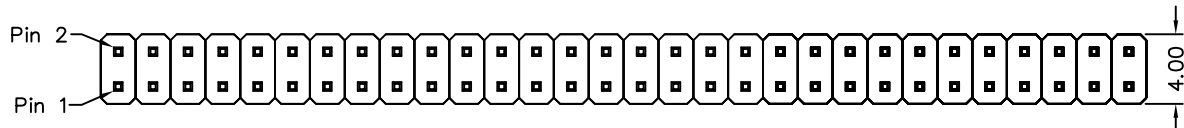
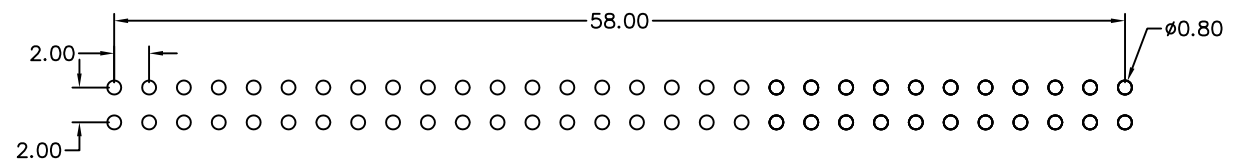


1 2 3 4 5 6 7 8 9 0

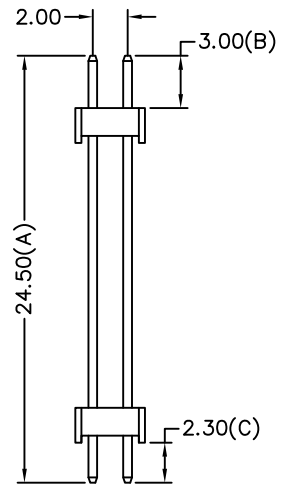

MATERIAL
 Contact Pin : Brass
SPECIFICATION
 Current Rate : 1 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute

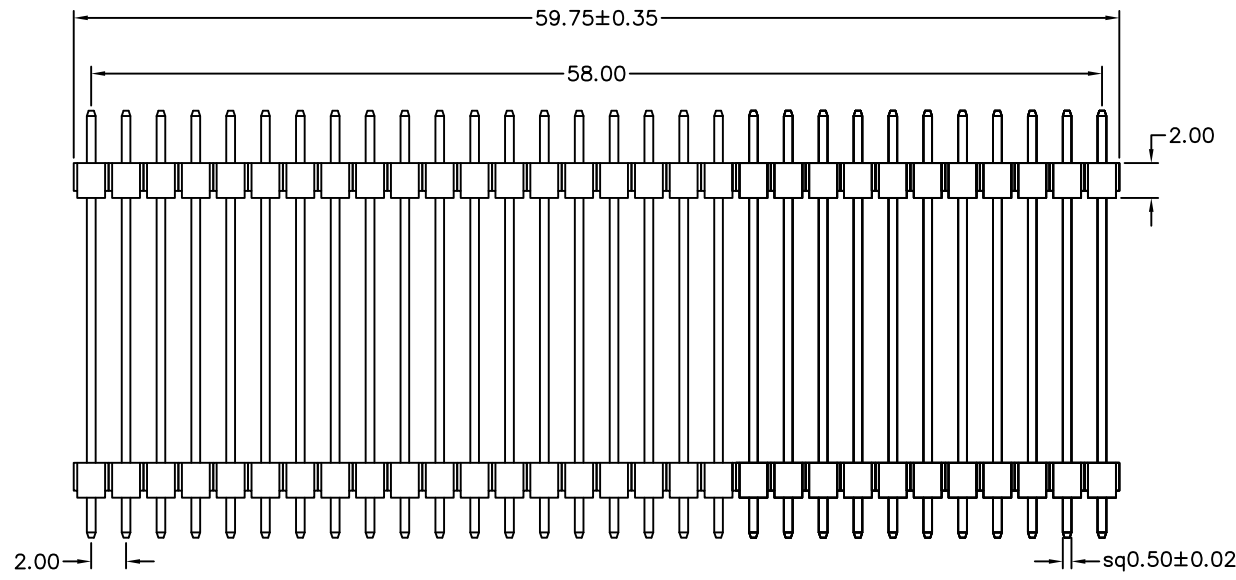

Recommended P.C.B Layout

MS-D2453023-2X30-LF
 LEADFREE
 RoHS Compliant

| | | | | |
|----------|---------------------------|-----------|--|--|
| | PART NO. MS-D2453023-2X30 | | TOLERANCES ARE X ± .X ± 0.30 .XX ± 0.20 .XXX ± ANG ± 3° | DESCRIPTION: PIN HEADER 2.00*2.00mm STRAIGHT TYPE, DUAL ROWS DUAL INSULATORS |
| | DWG NO. MS-D2453023-2X30 | | | |
| 焯倫股份有限公司 | FILE NO. | | DRAWING BY | AREA REVISIONS DATE |
| | UNIT / mm | SCALE 1:1 | PROJECTION | |