
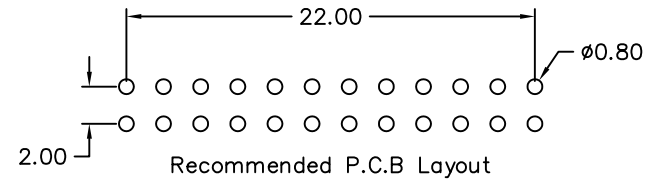
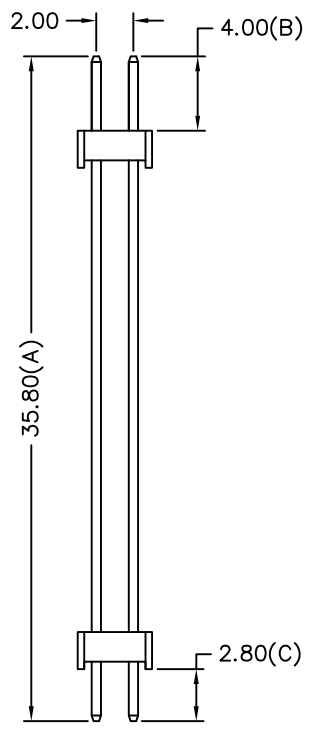
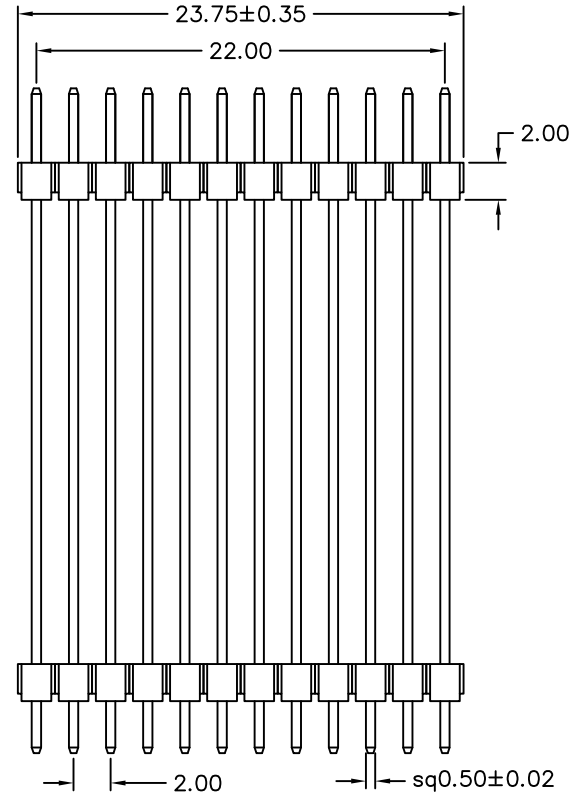


1 2 3 4 5 6 7 8 9 0

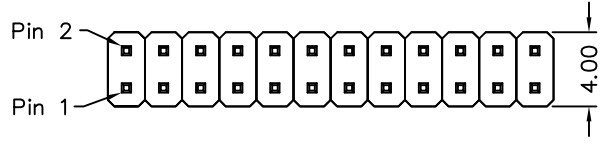

MATERIAL
Contact Pin : Brass

SPECIFICATION
Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute

MS-D3584028-2X12-LF
LEADFREE
RoHS Compliant

	PART NO. MS-D3584028-2X12		TOLERANCES ARE X ± .X ± 0.3 .XX ± 0.2 .XXX ± ANG	DESCRIPTION: PIN HEADER 2.00*2.00mm STRAIGHT TYPE, DUAL ROWS DUAL INSULATORS	AREA	REVISIONS	DATE
	DWG NO. MS-D3584028-2X12						
焯倫股份有限公司	FILE NO.		DRAWING BY				
	UNIT / mm	SCALE 1:1	PROJECTION				