


Recommended P.C.B Layout

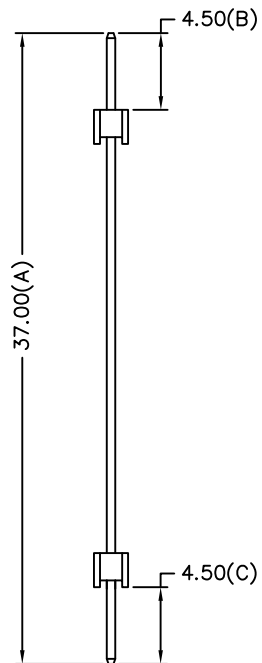

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

MS-D3704545-1X08E4-LF  
LEADFREE

RoHS Compliant



PART NO. MS-D3704545-1X08E4

DWG NO. MS-D3704545-1X08E4

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

ANG

DESCRIPTION:

PIN HEADER 2.00\*2.00mm  
STRAIGHT TYPE, SINGLE ROW  
DUAL INSULATORS

AREA

REVISIONS

HK

DATE

煜倫股份有限公司