

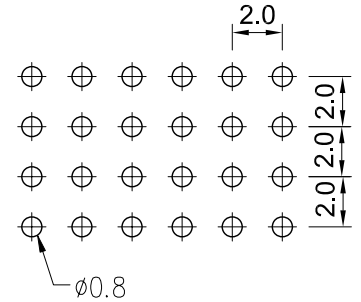
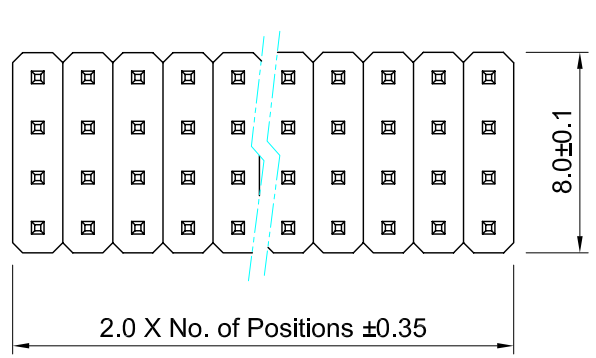
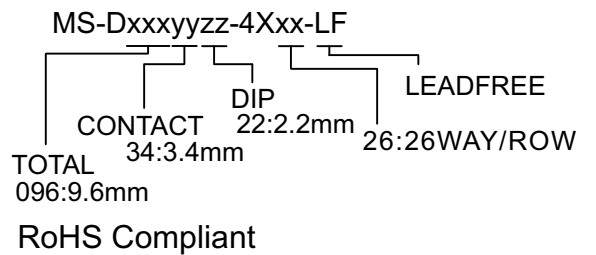


### Recommended P.C. Board Hole Layout

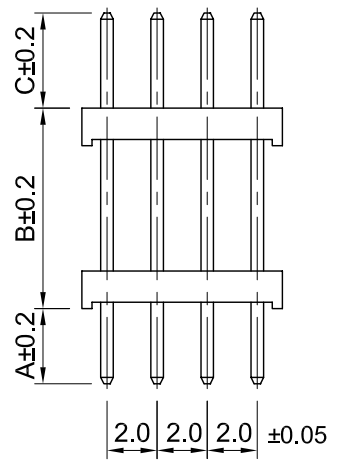

### Specifications

- Current Rating : 2 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Brass
- Insulator Material : Polyester, UL 94V-0 Nylon-6T
- Contact Plated : See Option
- Standard: Full Gold Flash

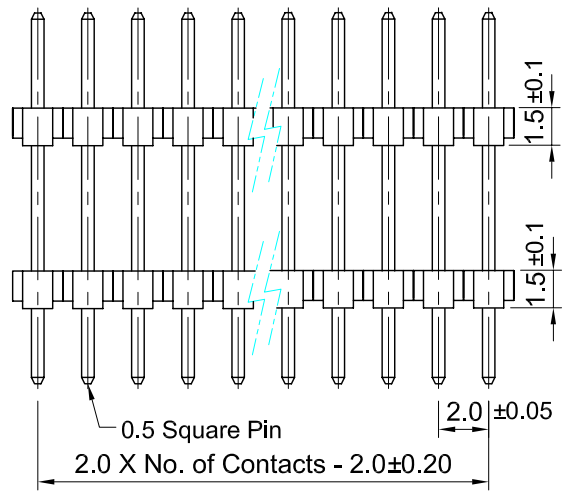

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

FILE NO.	PART NO. MS-Dxxxxyyzz-4Xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: Pin Header P2.0mm H:1.5mm, Quad Row , Right Angle Type		
	UNIT / mm	SCALE 1:1				DRAWING BY	
PROJECTION	UNIT / mm		SCALE 1:1	AREA	REVISIONS	HK	DATE

煜倫股份有限公司