

MATERIAL

Contact Pin : Brass




SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

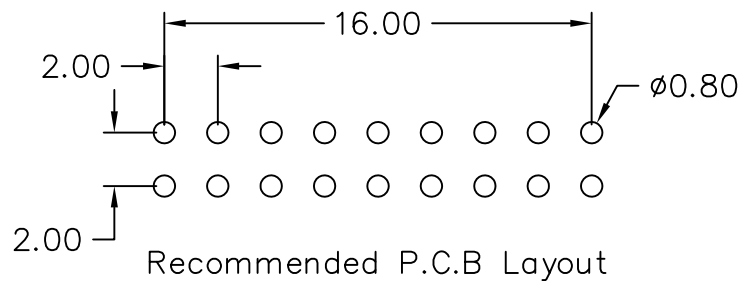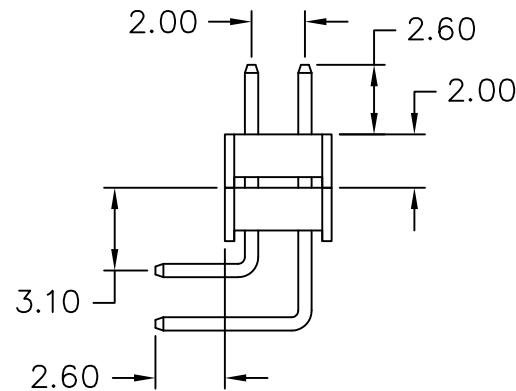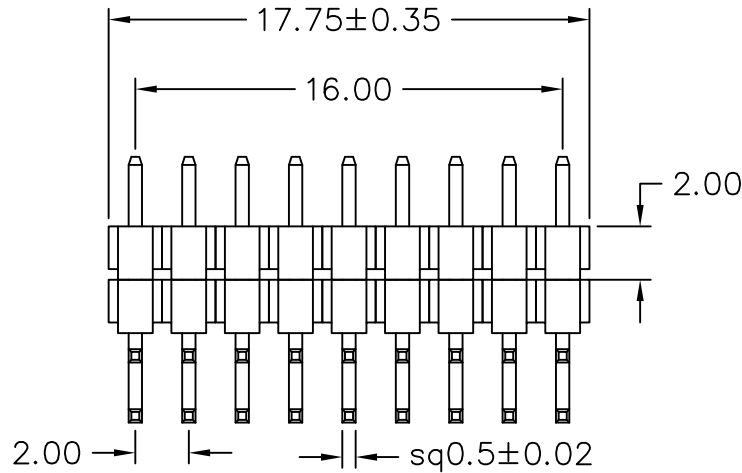

RoHS Compliant


TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		X.± .X±0.30 .XX±0.20 .XXX± ANG±3°
CHECKED BY GENIUS		
UNIT/mm	SCALE 1:1	
DATE		
SIZE A4	PJECTION	

照片框

ORDER INFORMATION

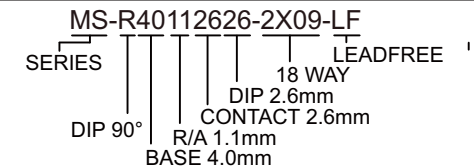

DESCRIPTION: PIN HEADER 2.00*2.00mm RIGHT ANGLE TYPE, DUAL ROWS