

P. C. B . LAYOUT

CONTACTS	
2X3	2X22
2X4	2X23
2X5	2X24
2X6	2X25
2X7	2X26
2X8	2X27
2X9	2X28
2X10	2X29
2X11	2X30
2X12	2X31
2X13	2X32
2X14	2X33
2X15	2X34
2X16	2X35
2X17	2X36
2X18	2X37
2X19	2X38
2X20	2X39
2X21	2X40

- A: 6.50 mm
- B: 5.00 mm
- C: 4.00 mm
- D: 2.20 mm

**MATERIAL**

HOUSING : NY6T,UL94V-0  
 HOUSING : NY6T,UL94V-0  
 CONTACT : COPPER ALLOYS  
 PLATED : GOLD-FLASH  
 COLOR : BLACK

**SPECIFICATION**

CURRENT : 2A  
 OPERATING TEMPERATURE : -55°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN  
 WITHSTANDING VOLTAGE : 500V AC/Minurt

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

X, ±  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ±  
 ANG ± 5°

PJECTION

照片框

**ORDER INFORMATION**

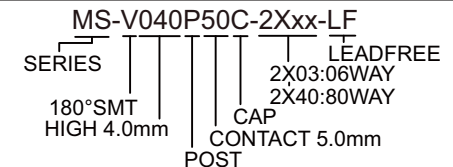

**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)

DESCRIPTION: