

# MATERIAL

Contact Pin : Brass




# SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

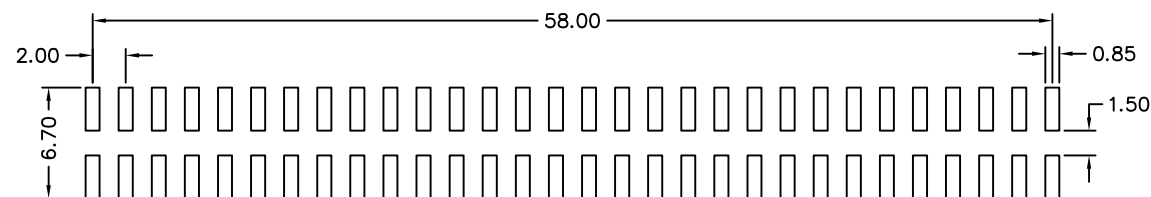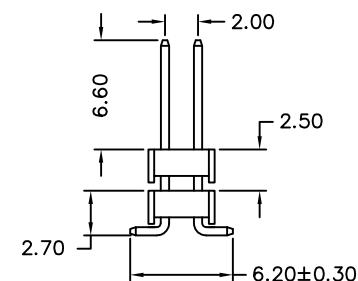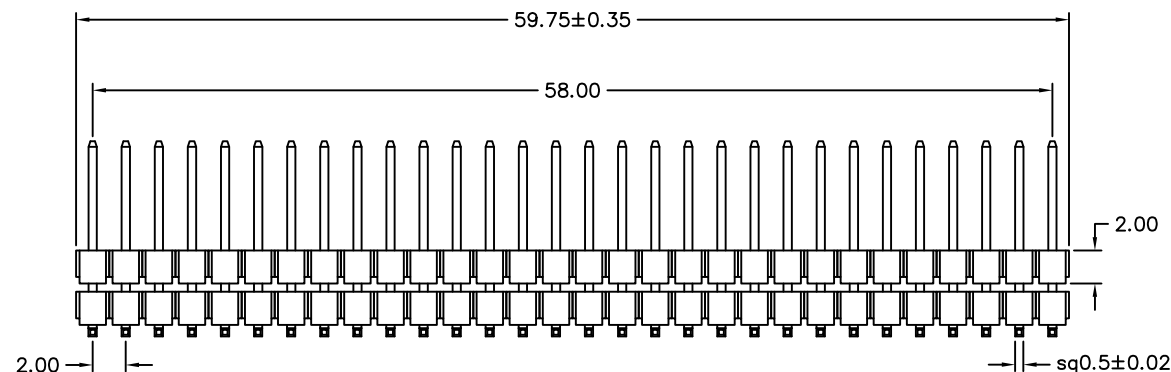

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ± 3°

照片框

# ORDER INFORMATION

MS-V052X66-2X30-LF  
SERIES  
LEADFREE  
60 WAY  
CONTACT 6.6mm  
NON POST  
HIGH 5.2mm  
180°SMT

DESCRIPTION:PIN HEADER 2.00\*2.00mm SMT S/T TYPE, DUAL ROWS DUAL INSULATORS