
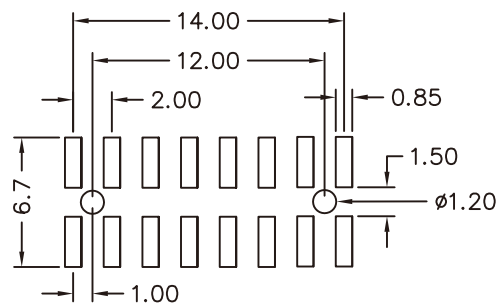
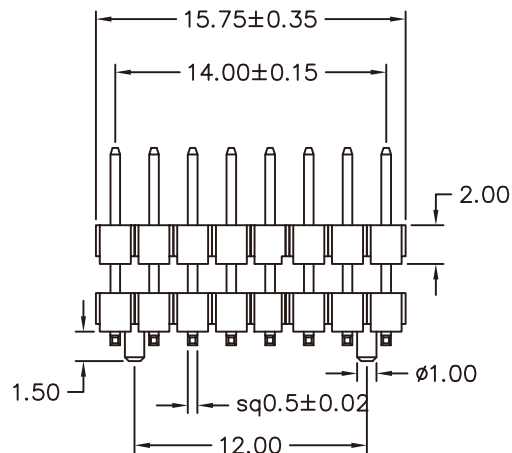


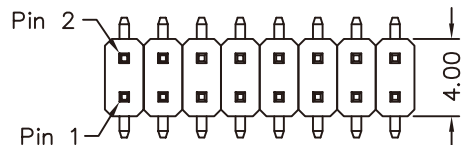

Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

SPECIFICATION


Current Rate : 1 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

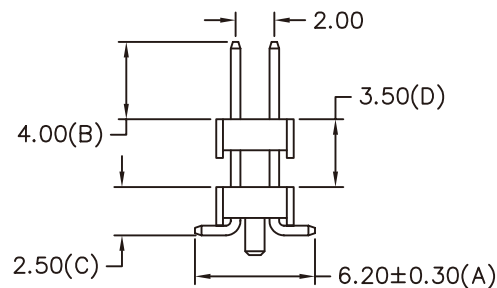

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X $\pm$ 0.30

.XX $\pm$ 0.20

.XXX $\pm$

ANG $\pm$ 3°

PPOJECTION

ORDER INFORMATION

MS-V060P-2X08-LF
SERIES POST 16 WAY LEADFREE
HIGH 6.0mm
180°SMT

DESCRIPTION: PIN HEADER 2.00*2.00mm SMT S/T TYPE, DUAL ROWS DUAL INSULATORS