


SECTION:A-A

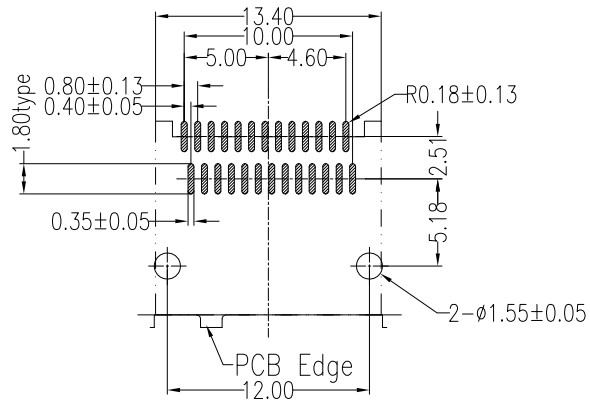

PCB LAYOUT(T=1.60mm)
COMPONENT SIDE

NOTES:

***Material**

Housing: LCP, UL 94V-0 rated, Color: Black;
Contact: Phosphor Bronze.
Plating: Gold plating over Nickel on contact area; Tin plating on solder tail.

***Mechanical**


Mating Force: 1.25N Max(Per Circuit).
Unmating Force: 0.25N Min(Per Circuit).
Contact Retention Force: 300G Min.

***Electrical Specification**

Current Rating: 0.5 Amps 30°C Max per contact;
Contact Resistance: 30 milliohms Max.
Insulation Resistance: 1000 Megohms Min.
Dielectric Withstanding Voltage: 300V AC

***Environmental**

Operating Temperature: -40°C to +85°C



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ±



ORDER INFORMATION

MSAS-SWP-026-LF

SERIES | POST | 26 WAY | LEADFREE
90° SMT
FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MINI SAS 26P Female (Without Shell)