


⑤	LATCH	SATA 7P SHORT LATCH	4	PCS
④	LABEL	LABEL:"04" TRANSLUCENT BOTTOM BK WORD	1	PCS
③	LABEL	LABEL:"03" TRANSLUCENT BOTTOM BK WORD	1	PCS
②	LABEL	LABEL:"02" TRANSLUCENT BOTTOM BK WORD	1	PCS
①	LABEL	LABEL:"01" TRANSLUCENT BOTTOM BK WORD	1	PCS
⑩	OVER MOLDING	PP COLOR:BLACK	A/R	KG
⑨	OVER MOLDING	PVC 50P COLOR:BLACK	A/R	KG
⑧	INNER MOLDING	PE	A/R	KG
⑦	编织网管	NYLON BRAID W:12mm	350	mm
⑥	LATCH	SAS 36P LATCH	1	PCS
⑤	TAPE	ACETATE TAPE BLACK W=20mm*50mm	2	PCS
④	套管	HEAT TUBE Ø3.0*15MM	4	PCS
③	SATA CONN	S-ATA-7P BLACK MOLDING 15u" WITH LATCH	4	PCS
②	Conn.	INT MINI SAS 36P PCB	1	SET
①	Cable	(#30*2C+2D)*8P+8C+FILLER	550*4	mm
NO.	PART NO.	DESCRIPTION	Q'TY	UNIT

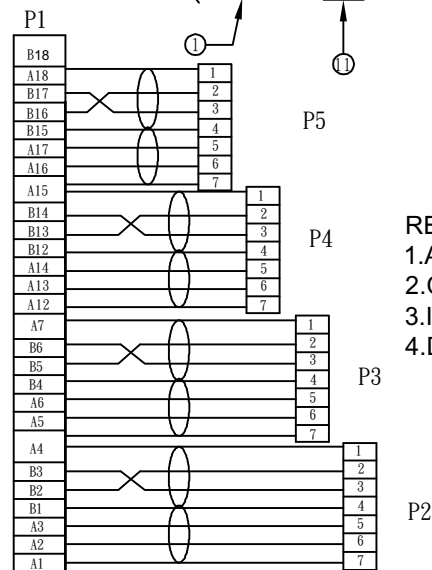

REQUIREMENT:

- 1.ANY OPEN.MISSING & INTERMITTENT ARE NOT PERMITTED
- 2.CONDUCTOR RESISTANCE: 3 OHMS MAX
- 3.INSULATION RESISTANCE:10M OHMS MIN/300V DC.
- 4.DIMENSIONS MARK" ▼ "SHOULD BE CHECKED;

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MSASSATA14-360730-E55C-LF

SERIES

LEADFREE
550mm
MALE TO FEMALE
30 AWG
36 TO 07 WAY

DESCRIPTION: