



PIN ASSIGNMENT:

Mini SAS 4i (TARGET)      SATA 7P (HOST)

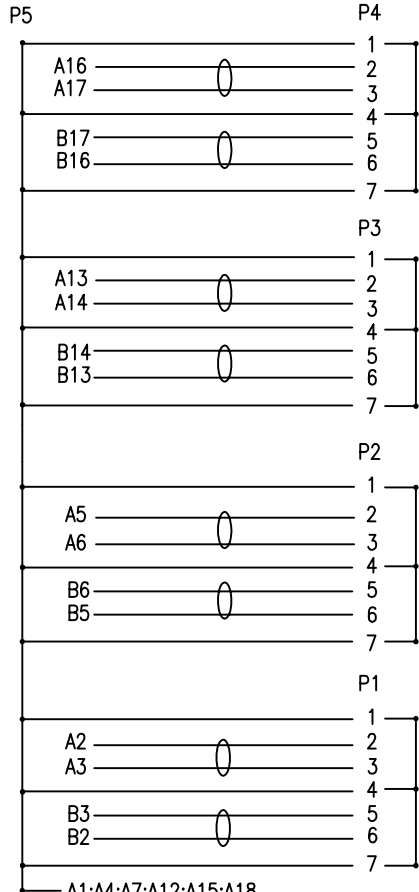

A1;A4;A7;A12;A15;A18  
B1;B4;B7;B12;B15;B18

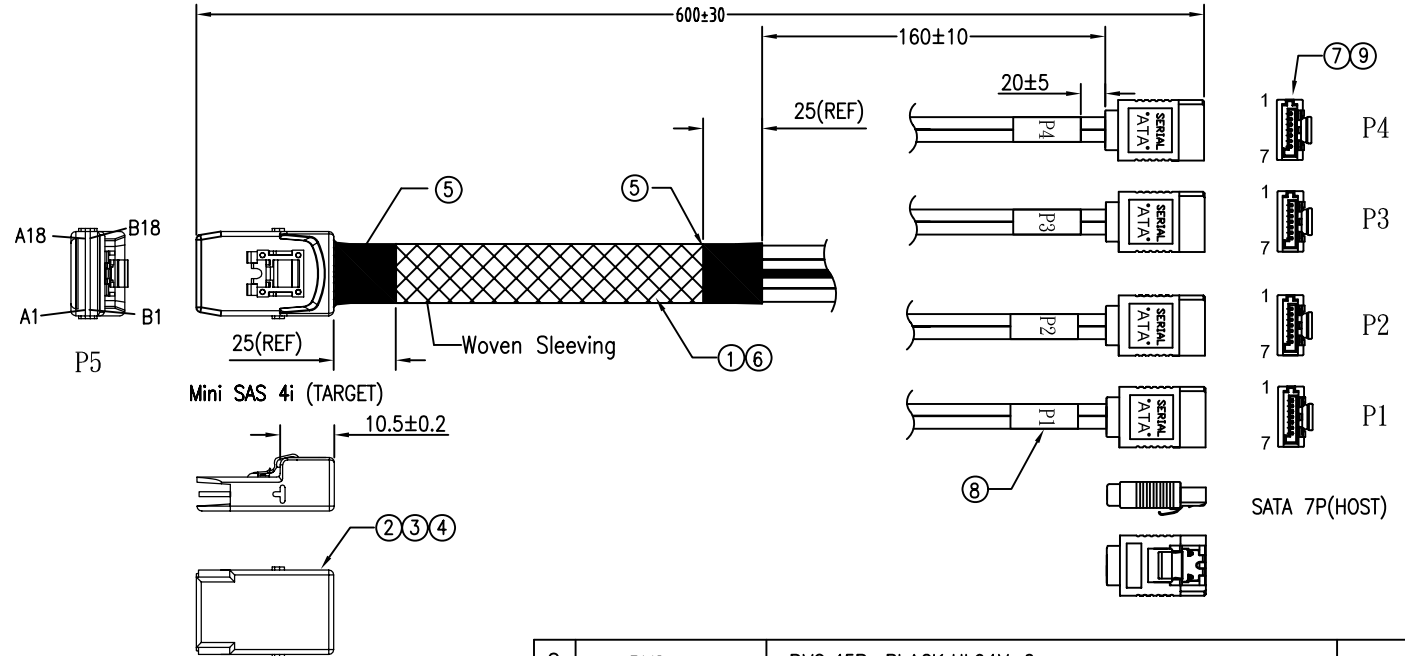

ELECTRICAL CHARACTER:

- a. 100% OPEN&SHORT TESTING
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec
- c. INSULATION RESISTANCE:10M Ohm(Min)
- d. CONDUCTIVE RESISTANCE:5 Ohm(Max).

9	PVC	PVC 45Pa BLACK UL94V-0	
8	LABEL	LABEL PRINT P1 & P2 & P3 & P4	
7	CONN 2	SATA 7P RECEPTACLE BLACK CONTACT:15U	
6	TUBE	WOVEN SLEEVING TUBE BLACK	
5	H.S.T	HEAT SHRINK TUBE BLACK ID:11.0mm	
4	PE	PE LOW DESNIGE	
3	PBT	PBT+30%G.F RG301 R16K BLACK	
2	CONN 1	MINI SAS 4i PLUG CONTACT:G/F W/LATCH W/PCB	
1	CABLE 1	(30AWG*2C+2D)*AL.MYLAR+MYLAR W/O JACKET	
NO.	PART NAME	SPEC DESCRIPTION	REMAKE

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm      SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION

照片框

ORDER INFORMATION

MSASSATA14-360730-E60C-LF

SERIES

LEADFREE  
600mm  
MALE TO FEMALE  
30 AWG  
36 TO 07 WAY

DESCRIPTION: Mini SAS 4i TO SATA(HOST) PLUG\*4