

Recommended P.C.B Layout

MATERIAL

Insulator : 30% Glass fiber PBT
 Contact Pin : Brass Gold plated

SPECIFICATION

Current Rate : 1 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

POLES	DIM E	POLES	DIM E
2	2.00	23	44.00
3	4.00	24	46.00
4	6.00	25	48.00
5	8.00	26	50.00
6	10.00	27	52.00
7	12.00	28	54.00
8	14.00	29	56.00
9	16.00	30	58.00
10	18.00	31	60.00
11	20.00	32	62.00
12	22.00	33	64.00
13	24.00	34	66.00
14	26.00	35	68.00
15	28.00	36	70.00
16	30.00	37	72.00
17	32.00	38	74.00
18	34.00	39	76.00
19	36.00	40	78.00
20	38.00	41	80.00
21	40.00	42	82.00
22	42.00	43	84.00
		44	86.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4 PPROJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°

照片框

ORDER INFORMATION

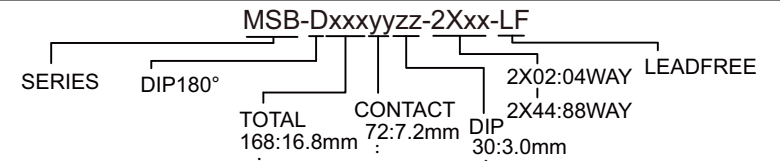

DESCRIPTION: PIN HEADER 2.00mm STRAIGHT TYPE, DUAL ROWS

煜倫股份有限公司

www.morethanall.com