


MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), BLACK
 INNER SHELL: COPPER ALLOY, NICKEL PLATING
 OUTER SHELL: THERMOPLASTIC (UL 94V-0), BLACK
 TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 100V
 OPERATION TEMPERATURE: -25°C~+85°C

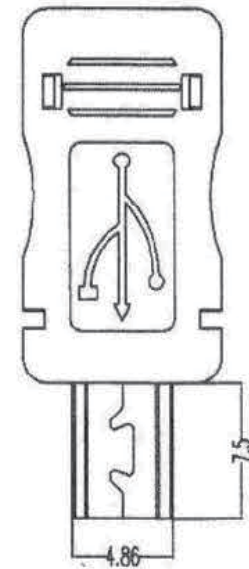

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PJECTION

照片框

ORDER INFORMATION

MSB-PA-8A-LF
 SERIES | LEADFREE
 | 8 PIN A TYPE
 | ASSEMBLY
 | MALE

DESCRIPTION: MINI USB, SOLDER MOUNT, VERTICAL, 8PIN, MALE