

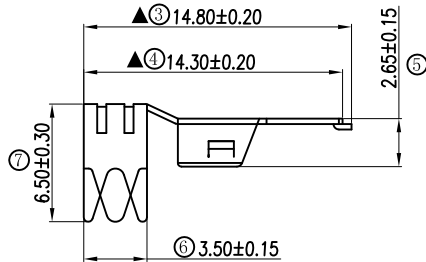


Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 30 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C

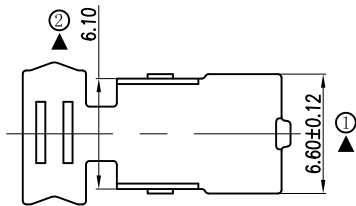

4	Back Shell	1	Cold rolled steel	T=0.30mm	Cu:40u"min. 80u"min Nickel Plated
3	Front Shell	1	Cold rolled steel	T=0.30mm	Cu:40u"min. 80u"min Nickel Plated
2	Contact	5	Brass	T=0.25mm	Contact area: 0.8u"min Gold Plated over 50u"Nickel min Solder area:100u"min Tin Plated over 50u"Nicked Min.
1	Housing	1	LCP	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks&Thickness	Finish

标注“▲”为重点管控尺寸

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

P PROJECTION

照片框

ORDER INFORMATION

MSB-PS-5B-LF
SERIES | LEADFREE
5P4C
SOLDER
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MINI USB-5PIN(M) 焊線式(五出四PIN)