
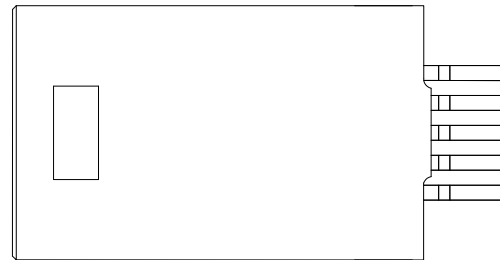
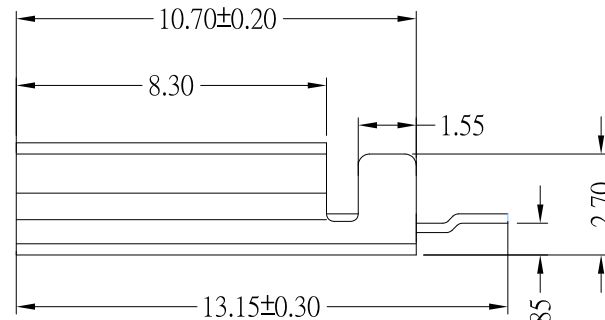


RECOMMENDED P.C.B LAYOUT

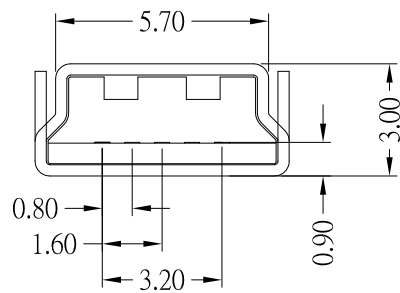

SPECIFICATIONS

Material:

- 1.Housing: LCP
- 2.Contact: Brass
- 3.Shell: Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

Electrical Characteristics:

- 1.rating: 30V AC , 1.5 A
- 2.Contact resistance: 30 mΩ Max
- 3.Insulation resistance: 1,000 MΩ Min
- 4.Dielectric withstanding voltage: 500V AC

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

PJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

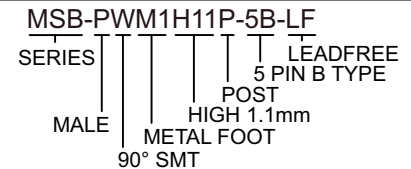

DESCRIPTION: MINI USB 5P