

规格说明:Specifications:

电气特性:Electrical:






1. 额定电流: Current Rating  
1.0A/contact terminal
2. 额定电压: Voltage Rating  
30V DC
3. 接触阻抗:Contact Resistance  
50 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:  
300 V AC For one minuter
5. 绝缘阻抗:Insulation Resistance:  
100MEGA ohms MIN

原材料:Raw material:

1. 塑胶:Plastic cement:  
Hing Temperature Thermoplastics,  
LCP Black/Nature
2. 端子:Contact:Copper Alloy C5191/C2680
3. 外壳:Shell: Copper Alloy C2680

电镀:Electroplate:

1. 端子:Contact: Plated Gold in Mating Area;  
Tin On Solder Talls
2. 外壳:Shell:  
Nickel Plating

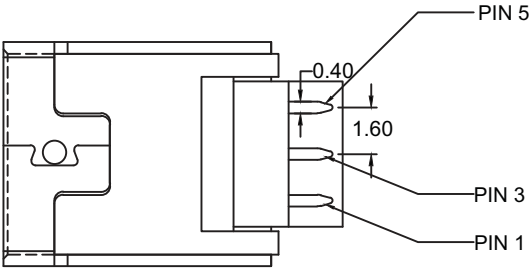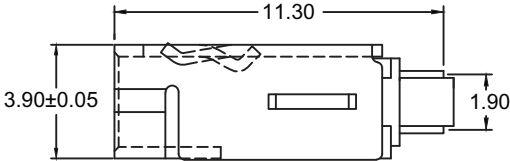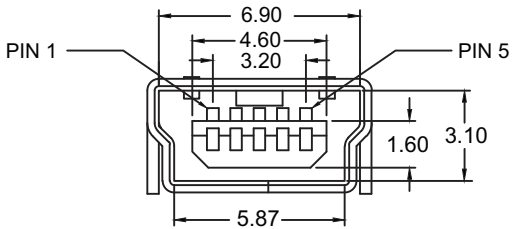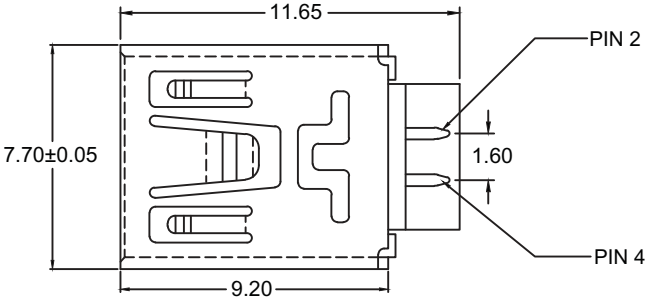

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ± 1°

ORDER INFORMATION

MSB-SM11M-5B-LF

SERIES | | | | LEADFREE  
5 PIN B TYPE  
METAL  
11.65mm  
MOLDING TYPE  
FEMALE

DESCRIPTION: MINI USB 5P/F180°焊線式B型(無腳加后塞)

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com