

備註 /NOTE:

1. 安規
  - 1-1. 規格 /RATING: 5V / 1A
  - 1-2. 絕緣阻抗 /Insulation Resistance: 100M ohm Min at DC 500V
  - 1-3. 絕緣耐壓 /Dielectric Withstanding Voltage: AC 100V for 1 Minute
  - 1-4. 接觸阻抗 /Contact Resistance: 30m ohm or less
2. 材質 /MATERIAL:
  - 2-1. 膠芯 /Housing: LCP
  - 2-2. 針 /Pin: 磷銅 /PHOSPHOR BRONZE/GOLD 10u"
  - 2-3. 銅殼 /Shell: 磷銅 /PHOSPHOR BRONZE/120u"/NI120u"

RoHS Compliant

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION



ORDER INFORMATION

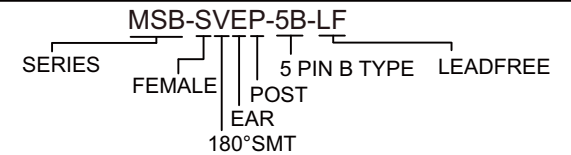

DESCRIPTION: MiniUSB 5 直立式SMT