

P.C.B. Layout



NOTE:

1. MATERIAL:

- a. HOUSING: PBT GLASS FIBRE UL94 V-0;
- b. CONTACT: PHOSPHOR BRONZE T=0.15
(SURFACE PLATING: Au+Sn+Ni)
- c. SHEEL: PHOSPHOR BRONZE T=0.20
(SURFACE PLATING: Ni)

2. ELECTRIC:

- a. CONTACT RATING: 0.3 A MAX
- b. INSULATION RESISTANCE: 500 MEGA OHMS MIN
- c. DIELECTRIC VOLTAGE: 250V AC ONE MIN LEVEL
- d. OPERATING TEMPERATURE: -25°C ~ +70°C

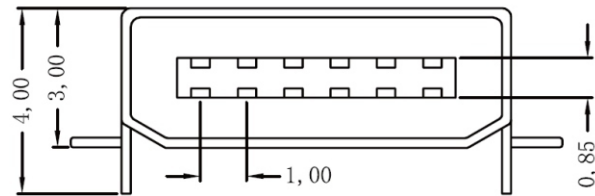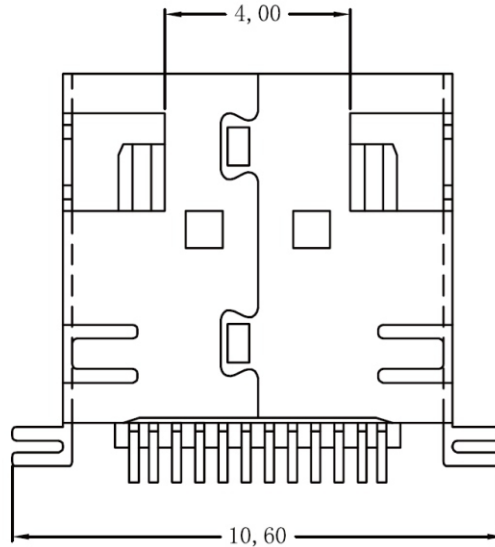

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MSB-SW-12B-LF
SERIES | LEADFREE
12 PIN B TYPE
90°SMT
FEMALE

DESCRIPTION: