


1. SHELL: Brass, T=0.4mm
Nickel Plated
2. HOUSING: NYLON PA9T G.F.
3. CONTACT: Phosphor Bronze, T=0.25mm
Tin plated 3u" on solder part
Gold plated 30u" on contact part
4. TEMPERATURE: -55°C~105°C

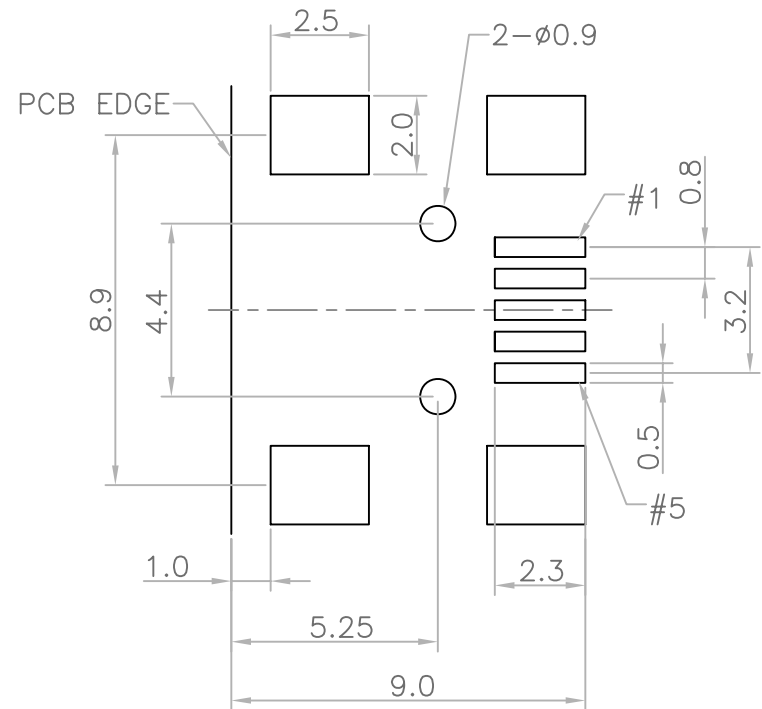

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.40
.XX ± 0.30
.XXX ± 0.20
ANG ± 3°

P PROJECTION

照片框

ORDER INFORMATION

MSB-SW-5B-LF
SERIES | LEADFREE
5 PIN B TYPE
90° SMT
FEMALE

DESCRIPTION: MINI USB B SMT TYPE 5 PIN FEMALE