

Recommend P.C.B Layout.

**備註/NOTE:**

**1. 安規/SAFETY:**

- 1-1. Temperature rise: 0.3Aac/30Vac.
- 1-2. Insulation resistance: 500Vac/1min.
- 1-3. Dielectric withstanding voltage: 250Vac/0.5mA/1min.
- 1-4. Low level resistance: full scale voltage 20mV/current 10mA.
- 1-5. Durability: 12000cycles-200mm/min.

**2. 材質/MATERIAL:**

- 2-1. 膠芯/HOUSING: LCP.
- 2-2. 端子/PIN: 磷銅/PHOSPHOR BRONZE.
- 2-3. 鐵殼/SHELL: 磷銅/PHOSPHOR BRONZE.

**3. 電鍍/PLATING:**

- 3-1. 端子/PIN: 前金30u"後鍍/GOLD30u" TIN. **A**
- 3-2. 鐵殼/SHELL: 霧錫/TIN.

**RoHS Compliant**

TOLERANCES ARE



**煜倫股份有限公司**

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±


.X ±

.XX ±


.XXX ±

ANG ±

PPOJECTION



**ORDER INFORMATION**

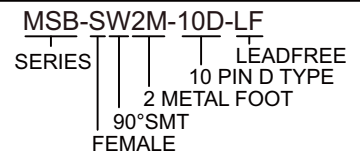

DESCRIPTION: MINI USB 10PIN (F) DIP