

备注:

1. 材料:

1.1. HOUSING: LCP GLASS FIBRE, UL94V-0;

1.2. SHELL: C2680 T=0.4;


1.3. CONTACT: C2680 T=0.25;

2. 电镀:

2.1 SHELL: ALL PLATING Ni 100u" OR Sn100u"

2.2 CONTACT: 接触部份镀金按客户要求; 其余部份Sn100u"

3. 未标示公差均以一般公差视之;

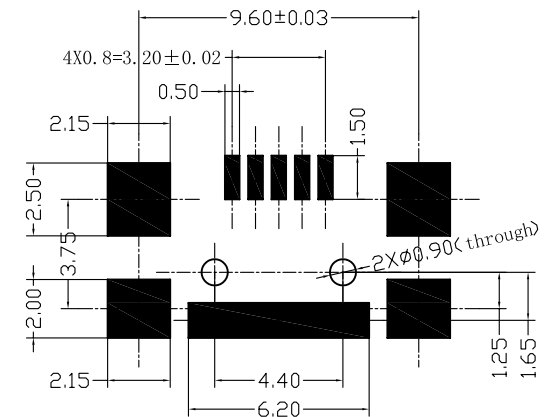

RECOMMEND PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

ORDER INFORMATION

MSB-SWE38P-5AB-LF  
SERIES | LEADFREE  
FEMALE | POST  
EAR TO EAR 3.75mm  
90°SMT

DESCRIPTION: MINI USB 5PIN F沉板短体 7.50