

备注:

1. 材料:

HOUSING:LCP GLASS FIBER, BLACK COLOR, UL94V-0

CONTACT:C5191, T=0.25mm

SHELL:C2680, T=0.40mm


2. 电镀:

CONTACT:15u" GOLD/TIN PLATING ON CONTACT AREA

100u" MIN. TIN-LEAD PLATING ON SOLDER TAILS

50u" MIN. NICKEL UNDERPLATING OVER ALL

SHELL:50u" MIN. NICKEL UNDERPLATING OVER ALL



SCALE 1:2

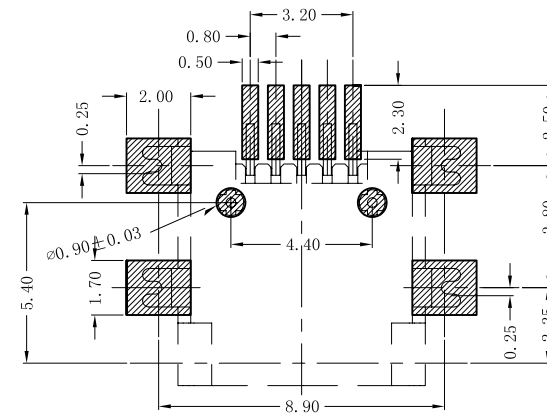


FIGURE A:PRINTED CIRCUIT BOARD (PCB) layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1:1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MSB-SWE38P5-5B-LF

SERIES | | | LEADFREE

FEMALE | | | 5 PIN B TYPE

POST DISTANCE 5.80mm

EAR TO EAR 3.80mm

90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MINI USB 5F短体成品(4)